

PATENT APPLICATION TRANSMITTAL LETTER

Docket No.

838

jc504 U.S. PTO

(Large Entity)



01/14/00

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Bjorklund et al.

For: MULTI-TIER WIRELESS COMMUNICATIONS ARCHITECTURE, APPLICATIONS AND METHODS

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. GB85960533X
- ☒ 13 sheets of drawings.
- ☐ A certified copy of a application.
- ☐ Declaration ☐ Signed. ☐ Unsigned.
- ☐ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☐ Other:

jc584 U.S. PTO
09/483167

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	32	- 20 =	12	x \$18.00	\$216.00
Indep. Claims	7	- 3 =	4	x \$78.00	\$312.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
TOTAL FILING FEE					\$1,288.00

- ☐ A check in the amount of to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-5407 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$1,288.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☒ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:

1/14/2000

"EXPRESS MAIL" Mailing Label Number GB85960533X

Date of Deposit

1/14/2000

I hereby certify under 37 CFR 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above, as is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

CC:

K. HORN

Signature

Chun Y. Yang Reg. No. 37,501

United States Patent Application

of

Ronald Bjorklund, Raj Bridgelall, William Derouchey,

Charles Furedy, Narayan Nambudiri and Richard Watson

for

Multi-Tier Wireless Communications Architecture, Applications and Methods

SPECIFICATION

BACKGROUND OF THE INVENTION

A. Field of the Invention

The present invention relates to multi-tier wireless communications architecture, applications and methods of using wireless units having differing communication functionalities and ranges.

B. Description of the Related Art

Each year more electronic devices are being deployed in a wider variety of commercial areas. In particular, data acquisition devices, such as bar code scanners, hand held terminals and radio frequency identification ("RFID") readers, are being adopted to speed up commercial operations and are a standard fixture in inventory tracking environments, as well as in many consumer businesses. With wide deployment of these electronic devices across manufacturing, inventory, and retail sales areas, there has been an increasingly strong demand for wireless connectivity between the data acquisition units and the corporate local area network ("LAN"). In

response, various wireless solution vendors have come up with systems using spread spectrum technologies in the 900 MHz and 2.4 GHz radio bands. Spread spectrum technologies are widely used in these applications because they can co-exist with other radio devices without causing significant interferences and thus do not require FCC licenses. Various examples and details of spread spectrum communication in these radio bands using base stations, access points and portable terminals are disclosed in the following patents assigned to Symbol Technologies, all of which patents are herein incorporated by reference: U.S. Patent 5,815,811; U.S. Patent 5,812,589; U.S. Patent 5,668,803; U.S. Patent 5,528,621; U.S. Patent 5,479,441; U.S. Patent 5,418,812; U.S. Patent 5,280,498; U.S. Patent 5,157,687; U.S. Patent 5,142,550; U.S. Patent 5,103,461; and U.S. Patent 5,029,183.

Although they have relatively long ranges and are versatile, these spread spectrum radio transceivers, however, have been generally expensive. Furthermore, due to the expensive nature of these radios, the applications have been generally limited to the more expensive data capture devices. However, cheaper and shorter-range radio transceivers, when used in conjunction with longer-range radios (collectively forming a "multi-tier radio communications architecture"), would have much broader applications heretofore unapplied, such as handheld terminals, price checkers, temperature and other sensors, hotel, school, and other door locks, and remote video cameras.

There also have been proposed multi-tier communication systems, such as the one disclosed in U.S. Patent 5,790,536, which is herein incorporated by reference. U.S. Patent 5,790,536 shows wireless units with relatively long range participating in the "premises" LAN and other wireless units with shorter range participating in the "peripheral" LAN. In such

conventional systems the main communications are done through the "premises" LAN, whereas in the "peripheral" LAN, wireless units are temporally formed (and dissolved) on an ad hoc basis for short communications such as for printing. Furthermore, the conventional systems generally require a coordination between the upper-tier radio communication protocol and the lower-tier radio communication protocol. These factors (i.e., need to accommodate ad hoc communications and protocol coordination between different tier units) generally contribute to a more expensive solution for the lower-tier radio transceiver. Moreover, U.S. Patent 5,790,536 discloses only a few specific applications and does not disclose detailed applications of the multi-tier architecture discussed hereinbelow.

SUMMARY OF THE INVENTION

Therefore, the proposals of the related art fail to comprehensively overcome the problems discussed above and other related problems. Advantages of this invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims.

In accordance with the purpose of the invention, as embodied and broadly described herein, the invention comprises: a first-tier base station comprising a first radio transceiver operating in accordance with a first communication protocol, the first-tier base station connected to a local area network ("LAN"), a second-tier base station comprising a second radio transceiver operating in accordance with a second communication protocol independent of the first communication protocol and the second-tier base station connected to the first-tier base station,

a first-tier remote unit wirelessly connected to the first-tier base station through the first radio transceiver, and a second-tier remote unit wirelessly connected to the second-tier base station through the second radio transceiver.

In another embodiment of the invention, the invention comprises: a host connected to a local area network, a first-tier base station connected to the host through the local area network, the first-tier base station comprising a first radio transceiver for spread spectrum radio transmission in accordance with a first communication protocol, a second-tier base station comprising a second radio transceiver operating in accordance with a second communication protocol independent of the first communication protocol and the second-tier base station connected to the first-tier base station, a remote unit wirelessly connected to the second-tier base station through the second radio transceiver.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description, serve to explain the principles of the invention.

FIG. 1 is a diagram of a multi-tier communication system built in accordance with the principles of the invention.

FIG. 2 is a diagram of another multi-tier communication system built in accordance with the principles of the invention.

FIG. 3 is a diagram of yet another multi-tier communication system built in accordance with the principles of the invention.

FIG. 4 is a diagram of an application adapted to a hotel environment in accordance with the principles of the invention.

5 FIG. 5 is a diagram of various enclosures for the base stations of the present invention.

FIG. 6 is a diagram of a surveillance camera application in accordance with the principles of the invention.

FIG. 7 is a diagram of an RFID application in accordance with the principles of the invention.

10 FIG. 8 is a diagram of a supermarket price checker application in accordance with the principles of the invention.

FIG. 9 is a block diagram of the components in the wireless unit.

FIG. 10 is a block diagram of the components used in the second-tier wireless communication system.

15 FIG. 11 illustrates the protocol used for the second-tier wireless communication.

FIG. 12 is a block diagram of the components used in the second-tier wireless communication system.

FIG. 13 is a block diagram of a second-tier communication system.

20

DETAILED DESCRIPTION OF THE EMBODIMENTS

Reference will now be made in detail to the embodiments of the invention, examples of which are illustrated in the accompanying drawings.

FIG. 1 illustrates a multi-tier communication system 100 in accordance with the present invention. The system comprises a wired LAN 110, a host computer 112 connected to wired LAN 110, a plurality of first-tier base stations 120, 122, and 124, a plurality of second-tier base stations 140, 142, 144, 152, and 154 and various types of wireless units 164, 166, 174, 176, 178, 184, 186, 188, and 190, with each of wireless units having respective wireless module 160, 162, 170, 171, 172, 180, 181, 182 or 183.

The wired backbone 110 could be any LAN, such as Ethernet, token ring, or token bus. Many of these LANs are now standardized by the IEEE: IEEE 802.3 (Ethernet), IEEE 802.4 (Token Bus), and IEEE 802.5 (Token Ring).

The first-tier base station could be any base station or access point readily available on the market. For example, WCCN Wireless Handbook - RF Terminals & LANs (1997 Third Edition), which is herein incorporated by reference in its entirety, describes at pp. 17-28, base stations used in vendor protocol dependent approach and access points in vendor protocol independent approach (or alternatively referred to as target protocol dependent approach). In this patent application, the term base stations refers to both base stations and access points.

In Fig. 1, base station 122 is connected to the wired LAN via a hard-wired link. Other base stations, such as 120 and 124, may be linked wirelessly to wired LAN 110 through base station 122. Wireless first-tier base stations 120 and 124 may be located away from the wired first-tier base station 122 in the range of a few to several hundred feet.

The second-tier station includes an RF transceiver meeting the following criteria: (1) the communication protocol of the second-tier base station must be independent of the protocol for the first-tier base station; (2) a relatively short range (5-100 feet); and (3) low power. An

example of an RF transceiver that could be used a second-tier base station is discussed in FIGs. 9-13 and the corresponding text. Another such radio transceiver could be the Bluetooth radio under development. See Bluetooth Specification, version 0.9, which is herein incorporated by reference in its entirety.

5 Second-tier base station 142 is linked to first-tier station 122 via a wired link 132 (or 130 or 134). Wired links 130, 132 and 134 could be any wired link. However, a preferred link would be a serial link, such as RS 232. A serial link, such as RS 232, is preferred because it is very cheap and ubiquitously available. Second-tier base station 142 is then wireless connected with another second-tier base station 152. Second-tier base station 152 in turn wirelessly
10 communicates with wireless units 174, 176 and 178. Each of these wireless units 174 (security locks), 176 (vending machine), and 178 (handheld terminal) includes respective wireless module 170, 171 or 172 for wireless communication. The details of wireless transceivers 170, 171 and 172 are discussed below in FIGs. 9-13. Through this multi-tier architecture, any of the wireless
15 units may communicate with any other device on the network, including host 112 and other wireless units.

 First-tier base station 120 and the related units attached thereto illustrate another configuration. First-tier base station 120 is wirelessly connected to wired LAN 110 via first-tier
20 base station 122 by relatively long-range radio. First-tier base station 120 is also connected to a second-tier base station 140 by a wired link 130. Second-tier base station 140 wirelessly communicates with wireless units 164 (hotel door locks) and 166 (vending machines), each of which includes a relatively short range wireless module 160 or 162. The configuration under first-tier base station 120 differs from that of first-tier base station 122 in that wireless units 164

and 166 are connected directly to second-base station 140 without another second-tier base station in between.

First-tier base station 120 and the related units attached thereto illustrate another configuration. First-tier base station 120 is wirelessly connected to wired LAN 110 via first-tier base station 122 by relatively long-range radio. First-tier base station 120 is also connected to a second-tier base station 140 by a wired link 130. Second-tier base station 140 wirelessly communicates with wireless units 164 (hotel door locks) and 166 (vending machines), each of which includes a relatively short range wireless module 160 or 162. The configuration under first-tier base station 120 differs from that of first-tier base station 122 in that wireless units 164 and 166 are connected directly to second-base station 140 without another second-tier base station in between.

First-tier base station 124 and the related units attached thereto illustrate yet another configuration. First-tier base station 124 is wirelessly connected to wired LAN 110 via first-tier base station 122 by relatively long-range radio. First-tier base station 124 is also connected to a second-tier base station 144 by a wired link 130. Second-tier base station 144, in turn, is connected to another second-tier base station 154 via one or more intermediate second-tier base stations (as indicated by dots in FIG. 1). In this manner, wireless units 184 (pager), 186 (building controls, serial devices), 188 (RFID, sensors, telemetry) and 190 (vending machine), each of which includes a relatively short range wireless module 180, 181, 182 or 183, may be connected to wired LAN 110 and other wireless units. The configuration under first-tier base station 124 differs from that of first-tier base station 122 in that wireless units 164 and 166 are connected to second-base station 140 with a plurality of second-tier base stations in between.

Note that the specific configurations shown in FIG. 1 are illustrative only and many other configurations are possible. Thus, any of the configurations under first-tier base stations 122, 120 and 124 may be mixed and matched. For example, first-tier base station 122 may be connected to wireless units via a plurality of intermediate second-tier base stations, as with first-tier base station 124 or may be connected to wireless units with only one second-tier base station, as with first-tier base station 120. Conversely, first-tier base station 120 may be set up with the configurations of first-tier base station 122 or 124, and first-tier base station 124 may be set up with the configurations of first-tier base station 120 or 122.

In a further alternative configuration (not shown in FIG. 1), there may be a plurality of wirelessly linked first-tier base stations. For example, there may be one or more wireless first-tier base station between base stations 120 and 122 and between base stations 124 and 122 in FIG. 1. In this manner, the range may be extended by relatively few long range base stations.

It will be understood that the multi-tier architecture provides at least the following benefits: (1) many wireless units (such as 164, 166, 174, 176, 178, 184, 186, 188 and 190) may be served by relatively inexpensive and relatively short range wireless modules; and (2) at the same time, the range is extended by placing relatively few long-range base stations in strategic locations, optimizing the range and the cost considerations.

FIG. 2 illustrates another multi-tier communication system 200 in accordance with the present invention. The system comprises a wired LAN 210, a host computer 212 connected to wired LAN 110, a plurality of first-tier base stations 220, 222, and 224, a plurality of second-tier base stations 240, 242, 244, 250, 252, and 254 and various types of wireless units 264, 266, 274, 276, 278, 284, 286, 288, and 290, with each of wireless units having respective wireless module

260, 262, 270, 271, 272, 280, 281, 282 or 283.

Multi-tier system 200 is similar to multi-tier system 100 of FIG. 1. In FIG. 2, however, first-tier base station is integrally formed with second-tier base station. For example, combined base station 225 includes both first-tier station 222 and second-tier station 242 in a common enclosure. Inside base station 225, first-tier station 222 may be linked to a separated second-tier station 242 via a serial link. Alternatively, the first-tier station and the second-tier station may be manufactured integrally together as a single unit. While not all the combinations are individually illustrated, it will be understood that all the configuration combinations discussed in FIG. 1 are equally applicable to the configurations in FIG. 2.

FIG. 3 illustrates yet another multi-tier architecture. Multi-tier system 300 comprises a wired LAN 310, a host computer 312 connected to wired LAN 310, a plurality of first-tier base stations 320, 322, and 324, a plurality of second-tier base stations 342, 344, various types of relatively long range wireless units 368, 370, 372, 374, 376, 378, 380 and 382, with each of wireless units having respective wireless communication module either built in as in 368 and 370 or in a module such as 360 (in an ISA card), 362 (in a PC card), 364 (in an Ethernet client bridge) or 366, and various types of relatively short range wireless units 390, 391, 392, 393, 394, 395, 396 and 398, with each of wireless units having respective wireless communication module 384, 386, 388, 356 or 358.

As illustrated in FIG. 3, the long range and short range wireless units may be computers, point of sale devices such as cash registers, printers, modems, serial/parallel devices, terminals, or data collectors such as bar code, RFID, magstripe, or smart card readers. They may also be hotel door locks, vending machines, security locks, handheld terminals, pagers, phones, building

controls, sensors or telemetry devices.

While specific applications with specific architecture are discussed for sake of simplifying the explanation, it will be understood that any one or combination of the architectures and variations on the components and subcomponents discussed in conjunction with FIGs. 1-3 may be used in any application discussed below.

FIG. 4 illustrates a specific application of the multi-tier communication architecture discussed above. In this application, the application system includes: hotel front desk 410, one or more long range first-tier base station 450, one or more short-range second-tier base stations 460, 470 or 480 and one or more hotel door locks 440.

Generally, the system operates in the following manner. Each floor of the hotel would generally have one first-tier base station, and a plurality of second-tier base stations will be linked serially and in parallel to the first-tier base station. For example, second-tier base stations 460, 470 and 480 are linked serially to first-tier base station 450, whereas second-tier base stations 460 and 490 are linked to first-tier base station 450 in parallel. Second-tier base stations 460 and 490 may be linked to first-tier base station 450 by wire as discussed in FIG. 1. In the alternative, second-tier base stations may be integrally encased with the first-tier station as in FIG. 2. It will be understood that any one of the configurations discussed in conjunction with FIGs. 1-3 may be used in the embodiment shown in FIG. 4.

Each door lock (generally the main door) for each room would be a wireless unit with a wireless communication module. For example, door lock 440 includes a wireless communication module 420 for communication with second-tier base station 460, 470, 480 or 490. Door lock 440 also includes additional circuitry: a sensor for detecting conditions of the

door (open or closed); locking mechanism which, in response to the control signals from the front desk (or the administrator) transmitted to the door lock through wireless communication module 420, is adapted to configure the lock mechanism as needed.

One operation of this system is follows. A hotel guest would arrive at the front desk.

5 The guest is checked in and the guest is given a door key 442 in the form of a card, programmed by a programming unit 412. Programming unit 412 may be a magstripe type or punch hole type or any other programmable key. Front desk computer 414 would program a unique code to key 442, depending on the room being assigned and a password. Preferably, at the time of such programming, front desk computer would also communicate with the door lock of the room
10 being assigned via wired LAN 430, first-tier base station 450 and one or more second-tier base stations, thereby programming the door lock at the time the guest is being checked in. This ability to program each room door wirelessly allows a lot of flexibility. For example, after guest walks up to the room he or she is assigned, the guest realizes that he or she wants another room (perhaps the room is a smoking room and he or she wants a non-smoking room, or vice versa).
15 In this situation, the guest would could call the front desk from the room initially assigned and request another room. The front desk personnel would be able to assign a new room to the guest and communicate with the door lock of the new room being assigned to accept the guest's existing key. In this way, the guest can use the key he or she already has and does not need to even come down to the front desk.

20 In another use of the system, the wirelessly controlled door locks may also be useful in emergency situations. For example, the doors of all the rooms (or of certain sections of the hotel) may automatically become unlocked during a fire so that the hotel, fire-fighter or other

emergency personnel may easily get to individual guest rooms.

Also, the door locks may be continuously monitored through the network for security purposes. For example, if a door is left open for any extended period of time, a security guard may be sent to the room to check to see if any

5 While the application of FIG. 4 is particularly useful in a hotel environment, other applications also possible. For example, in light of the increase in school violence, security has become a top concern for schools and local communities. Applying the system of the present invention to the school environment, all the doors into a school building may be easily monitored by relatively few people. A security guard may be quickly dispatched to any door that is not
10 supposed to stay open. Similar applications may be used in hospitals, banks, retail and convenience stores, private homes and businesses.

15 In another variation of the embodiment disclosed in FIG. 4, in addition to the door locks, wireless units may be thermostat controls in individual guest rooms. In this embodiment, each thermostat control in each guest room would include a wireless communication module for communication with a second-tier base station. The second-tier base station would either directly or indirectly through a series of other second-tier base stations link with a first-tier base station, which in turn is directly or indirectly connected to a wired LAN. In this way, the temperatures in guest rooms may be individually monitored and controlled. This feature would be useful in a variety of ways: (1) Energy savings: The hotel could realize substantial energy
20 saving by having the vacant room immediately go into energy saving mode as soon as the guest checks out until the next check in; (2) Flexible control: The hotel could even provide customized temperature setting (e.g., relatively warm, standard or relatively cold) in advance for guests so

that upon arrival in their assigned rooms, the room temperature will be already pleasant for the particular guest. A guest's temperature preference may be obtained: (1) when the guest makes the room reservation; (2) in a survey during a check-out for the next visit; or (3) monitored electronically using the thermostat monitors and wireless modules of the present invention for

5 next visit.

FIG. 5 shows various disguises or enclosures for first-tier and second-tier base stations, antennas and other network hardware. The enclosure system of FIG. 5 includes: overall enclosure 510, power line 520, fasteners 540 and LAN connection 530. As shown in FIG. 5, the outside of the enclosure in a hotel would typically include panels with various signs such as

10 "EXIT", "STAIRS", directions to the rooms "100-134->" or "<- 135-165". The enclosure would typically cover the base station, as well as an alarm and a light source to make the sign visible. Power line 520 provides power to the base station, the alarm and the light source. LAN

connection 530 could be a wired or wireless connection from the base station to the LAN. Other attachment or disguise possibilities include: water coolers, vending machines, fire alarms and

15 public announcement speakers.

FIG. 6 illustrates another application useful in security-sensitive environment. This system allows video security cameras to be placed anywhere without wiring, in places such as hotels, hospitals, schools, banks, retail and convenience stores, private homes and businesses. Security system 600 comprises a wired LAN 690, a host 650, video monitor(s) 652, a first tier

20 base station 640, a second tier base station 670 and video cameras 610 and 620. Video camera 610 includes a wireless communication module 660 for communication with first-tier base station 640. To increase the range, there may be placed additional first-tier base stations between

video camera 610 and first-tier base station 640. Video camera 610 and its communication module 660 are particularly useful in situations where high data throughput (such as high video resolution) is desired and/or the video camera is located relatively far from the first-tier base station. On the other hand, video camera 620 includes a wireless communication module 680 and communicates with a second-tier base station 670. Second-tier base station, in turn, is wiredly connected with first-tier base station 640. In the multi-tier surveillance camera system, adaptive rate wireless video monitoring is achieved. Thus, video capture rate varies based on wireless network traffic -- when the network use is light, fast picture refresh is obtained, whereas when there is heavy network use, slow picture refresh is obtained. The refresh rate can also be changed via remote command or program. For example, certain alarm or trigger event may boost the refresh rate of select cameras to maximum.

The video surveillance system of FIG. 6 may be used in conjunction with the system described in FIG. 4. For example, when the system of FIG. 4 detects that a certain door is being opened, the surveillance camera system of FIG. 6 may bring that particular door to the main monitor and alert the security guard by some indication (such as an audible beep or visual indication). At the same time, the refresh rate and the resolution of that particular video camera may be maximized or otherwise adjusted for better viewing. The systems of FIGs. 4 and 6 may additionally include a wireless intercom system for voice communication. Thus, a guest (parent at a school) attempting to enter the premises through an unauthorized door may be directed to another door for entry.

FIG. 7 illustrates another multi-tier communication system as applied to a radio frequency identification ("RFID") data collection system. Many warehousing and end-user

receiving facilities consist of multiple adjacent portals through which goods are transferred. In a conventional system, multiple (adjacent) portal/gate RFID readers are connected to a local or wide area network (LAN/WAN) via a host which is wired serially to each gate reader. An alternate embodiment of conventional systems is parallel connection of each RFID reader to the host. This type of wired installation adds significant cost and installation time. In addition, it generally requires changes to the physical environment in order to add the cabling and supporting equipment.

The system illustrated in FIG. 7 provides wireless connectivity of multiple adjacent data collection devices (e.g. RFID and/or barcode readers.) In order to maintain lowest infrastructure cost, portal readers that are within a few meters of each other can utilize minimum cost second-tier radios that will provide peer-to-peer connectivity. Each data collection device will transfer its data to a nearby reader in a hand-off fashion until the packets arrive at the master device which has longer range/higher bandwidth connectivity (e.g. Spectrum 24) to a host. If a particular reader is busy, the data can be buffered. The host can be connected to a WAN or the Internet in order to provide remote visibility of the data capture activities at the warehouse. Using the system of FIG. 7, the infrastructure installation cost is lowered and the cost of relocation or expansion (many warehousing facilities are rented and major modifications are not generally allowed) is reduced substantially.

FIG. 8 illustrates yet another multi-tier communication system as applied to a retail price checker system. Toy stores and other variety of retail stores have price checking stations set up where a customer would generally scan the bar code on an item (such as a toy) to find out the price. Such price checking stations free up store clerks to do other tasks than answering price

questions. The price checking station also may be more versatile and offer additional information about the product (such as any sales information and any other information). However, retail stores generally do not have the price checking stations in every aisle due to the high wiring and installation costs. The system shown in FIG. 8 provides a way to provide such a price checking station on every aisle relatively inexpensively. Because the "price checking station" can become more versatile and provide any type of interactive information, it will be referred to as "customer inquiry station" hereinafter.

FIG. 8 shows a number of aisle sections 890, 892, and 894, each of which section includes one or more customer inquiry station. For example, aisle section 890 includes customer inquiry station 830 and 832. Each customer inquiry station includes (or attached to) a wireless communication module for second-tier communication. For example, customer inquiry stations 830, 832, 834, and 836 may be set up to communicate with second-tier base station 880 via respective wireless modules 850, 852, 854, and 856. Similarly, additional second-tier base stations may be set up to communicate with other customer inquiry stations (shown in FIG. 8 as a dotted line). The customer inquiry station would also typically include: (a) a data entry device, such as a bar code reader, an RFID reader, a mouse, or a keyboard; and (b) an output means such as a monitor, an LCD display, or a printer. In general, a plurality of second-tier base stations would be linked to a first-tier base station 810. First-tier base station with the relatively longer range would be either wiredly connected to a LAN or wirelessly connected to another first-tier base station for indirect link to a LAN.

Heretofore, various multi-tier systems using first-tier base stations and second-tier base stations and second-tier communication modules have been discussed. As discussed above, the

first-tier base stations in the 900 MHz and 2.4 GHz bands are widely available on the market. Examples of such radio frequency systems are discussed in WCCN Wireless Handbook - RF Terminals & LANs (1997 Third Edition). The following section is a detailed description of one embodiment (referred to as the "RADPAD" system) of the second-tier base station and the

5 corresponding second-tier communication module in the wireless unit that may be used in the present invention.

1. Introduction

1.1 Abbreviations / Acronyms

Cordless Base (CB or "base"). The "base" station is requisite to support a BSS entity.

10 This central element manages the associations of all stations in a BSS and communications among them.

Cordless Station (CS or "station"). Any product that incorporates a RADPAD for cordless application operation.

RadPad. Radio Packet Assembler / Disassembler.

15 TIM. Traffic Indication Message. An element of the CB Beacon frame indicating that specific associated stations had buffered messages waiting for delivery.

BSA. Basic Service Area.

BSS. Basic Service Set is the active collection of a CB and associated CS devices.

BSSID. Basic Service Set Identifier is the key addressing element that defines the

20 bounds of any one BSS. Typically this value will be the Node ID of the CB component plus one byte determined by the CB at power up time.

ESSID. Extended Service Set Identifier. This is the identifier of a collection of

associated BSS systems.

PPP. Point-to-Point Protocol (IETF RFC-1661).

TSF. Timing Synchronization Function. The RadPad protocol element used to synchronize all associated stations.

5 SID. Station Identification code is the value (between 1 and 254) assigned by the base to each associated CS entity. This value becomes a bit offset in the TIM to indicate the existence of queued frames at the base.

RCP. RadPad Command Protocol is the command set used to configure the local RadPad components for either base or CS.

10 RDP. RadPad Data Protocol is the nominal "data" format between a RadPad entity and its serial port client.

RRCP. RadPad Remote Command Protocol is the service by which one RadPad serial point client may remotely configure remote RadPad.

MAC. Media Access Control.

15 2. Introduction.

2.1 RadPad Functional Overview.

The RADPAD system is a discrete, embedded, & low-cost PCB product designed for support of wireless communication for cordless devices without requiring the traditional full LAN software stacks. RADPAD is intended for portable, battery powered equipment and
20 therefore, includes a power management design feature. RADPAD is a compound device that combines a radio (ISO physical layer) along with software which runs the RADPAD protocol (ISO Data Link layer) on a digital section that is "host" accessed via a standard serial interface.

Serial port access to configuration and data link services uses either (1) the Point-to-Point Protocol (PPP) frame format for transferring data on and off the RADPAD unit or (2) asynchronous character serial I/O with support for "command" and "data" modes.

The RADPAD protocol functionality and serial application programming interface (API) are specified herein. The API is defined by the interface to the serial port as discussed in Section 4. The electrical interface is specified by the serial connector as discussed in Section 5 and RF (antenna) connector as discussed in Section 7.

The RADPAD API defines both configuration commands and data formats. The commands allow a hosting device to configure RADPAD parameters such as RF channel, addresses, error control, and timing parameters. Any data sent to the serial port will be sent across the radio link to another RADPAD selected by the user. Discrimination between data and command streams is achieved by selected PPP frame elements or current device mode as described in Section 3.

The RADPAD RF data rate is 50 Kbps and is capable of a minimum range of 50+ feet (typical open environment) with low power consumption(1 mW & 10 mW). The RADPAD radio provides frequency tuning from 2400 to 2500 MHz in 1 MHz increments. The large number of channels provides a means for avoiding interference and therefore ensures a reliable RF connection over the entire RF range. Single frequency radios have no means of avoiding interference and therefore are subject to dramatic reduction in range without recourse.

The addressability of any one station can be extended by compounding BSS entities that utilize the "repeater" capability of a base. This extends the effective range of any station in communicating with a designated BSSID to beyond the 50+ foot radius. In this configuration,

each station is associated with a particular base, but the final destination of the frames may be an ESS base or any other station that is accessible through the local base that is acting as a repeater. (see Figure 2).

2.2. RadPad Implementation Perspective

While several alternative implementations are possible, the following could be one implementation.

2.2.1 RadPad Hardware Interface --

The host system must provide 5 volt DC power to the board for serial and radio enabling. The host system must be able to properly interface with the 10 pin serial connector interface. The host system must provide an adequate antenna for the RF interface. Symbol's units have a built-in on-board antenna, but is not intended to support maximum range applications. Configuration with a 2.4 GHz high gain antenna will maximize the effective range.

2.2.2 RadPad Software Interfaces --

The host system must be able to properly configure the RadPad from persistent information known to the host. The host system must provide a mechanism for inputting the (1) client / base operating frequency; (2) the ES identification to which it will belong; and (3) the target "partner" user ID. The host system may also, optionally, wish to support remote management of devices in the ESS.

3. Protocol Description

3.1 Basic Service Area

The basic cordless network cell is called a BSA (Basic Service Area). A collection of stations within a BSA that are associated with a common CB or base form a Basic Service

Set(BSS). The size of a cell is dependent on the environment and the characteristics of the wireless transceivers. Each BSS has a unique identifier (BSSID) where the BSSID is the NodeID of the cordless base with the addition of a single byte chosen by the base each time it is powered up.

3.2 Cordless Station

This component is the application agent that utilizes the RADPAD as a communication link. Provision is made in the design of the station to specify the designated ESSID of the base (typically, via scanning a special bar code). When powered up and properly configured, the RADPAD will: (a) associate with the target base (matching the ESSID values) and (b) provide best-effort datagram transmission and reception across the radio link to a designated "partner". By design, the associations and link state information will be preserved across RadPad power cycles.

3.3 Cordless Bases

A Cordless Base (or base) is always present in a cordless cell and provides the following basic functionality: (a) Association functions which allow a station to join a particular base's BSS; (b) Synchronization functions which ensure that all stations currently associated with the base are synchronized on a common clock. This synchronization is used, for example, in supporting repeater and power management; (c) Frame buffering and other associated power-management functions for power-conserving stations; (d) Application gateway services to any attached "host" device; and (e) Manage ESS associations. A repeater base is also a station to a superior BSSID and will forward messages to this address if the local addressing cannot be resolved. The base is the essential element in the operation of a BSS and must be the first device

activated. Should this component lose power or fail for any reason, the entire BSS will fail, requiring a re-association of each station upon reactivation. For this reason, implementation of the base system should consider fault tolerant elements to minimize operational problems.

3.4 Basic RadPad Protocol Architecture

RadPad uses positive acknowledgments for detection and retransmission of lost frames. Since multiple frames are often involved in a single exchange, the concept of a MAC Protocol Data Unit (MPDU) is introduced. An MPDU may, for example, constitute either Data and ACK frames. There is provision for support of broadcast frames (e.g., Beacons) which require no acknowledgment. There is no support for multicast addressing.

There is no notion of a "session" or "virtual circuit" supported by this architecture. Only datagram transport reliability is assured by the RadPad, and that only if the MAC protocol is not called upon to forward frames.

3.5 MAC Acknowledgments

The MAC-level Acknowledgment allows the detection of a lost frame and recovery by retransmission at the MAC level transparent to the application level. All data transmissions use the Request/Response (Data+ACK) architecture, except for broadcast frames sent to stations. The singular exception is broadcast frames which are generated by stations and are to be forwarded by a base will be acknowledged by the base.

Since MAC-level acknowledgments and re-transmissions are implemented, there is the possibility that a frame may be received more than once. Such duplicate frames are filtered out by the receiving MAC. Duplicate frame filtering is facilitated through the inclusion of a Sequence field within the Data and ACK frames.

RADPAD station is designed such that the association state and frame sequence number is preserved across RADPAD power cycles. This design optimizes performance of the host device and minimizes power consumption.

If no acknowledgment is received within a predetermined "Acknowledgment Window" (approximately 3 milliseconds) after a frame has been transmitted, the original frame is retransmitted. This process will continue until a configurable number of re-transmissions has been reached.

Confirmation or error indications are returned to the data source as discussed in Section 4 below.

3.6 Time Synchronization

A critical function within RADPAD is the synchronization of time among all stations within a BSS. This is used for important functions such as power management.

The base is the timing master and performs the Timing Synchronization Function (TSF). To synchronize the stations in a BSS, the base sends out periodic frames called Beacons. Receiving stations coordinate all of their activities to the arrival of these frames.

3.7 Power Management

An essential part of the RADPAD is the ability to conserve station power consumption as much as possible. This is achieved by the following architectural features: Synchronize all stations operating in Power Save Mode within a BSS. Allow stations to power down their transceivers for most of the time. Temporarily buffer frames for "sleeping" stations at the base. Announce the buffered frames to the stations at regular predetermined intervals, so that a station can sleep until it wishes to hear such an announcement, at which point it can take steps to ensure

that any buffered frames are properly received.

The basic approach is for the base to temporarily buffer frames for stations will only transmit them in response to a poll from the station. The stations which have buffered frames within the base are identified in a Traffic Indication Map (TIM), which is periodically generated
5 by the base as an element within a Beacon. A station may determine that a frame is buffered for it by listening to a TIM and can then take action to ensure that the frame is forwarded from the base.

Beacons (with TIMs) are periodically generated by the base, separated by a specified time interval; "Beacon Interval" (which is a BSS parameter known by all stations within the BSS
10 upon association with the base). Stations will transmit a Poll frame to the base, which will respond by transmitting the corresponding buffered frame.

It is anticipated that different networks may set the Beacon Interval to different values depending upon the nature of the applications being supported. Because it is a key architectural element, proper establishment of the Beacon Interval greatly impacts observed performance.

3.8 TIM Transmissions

Beacons containing a TIM are sent at regular intervals and will identify the stations for which traffic is pending and buffered in the base. This information is coded in a virtual bitmap. To allow efficient coding, every station is assigned a Station ID code (SID) by the base as part of the "association" process. The TIM will identify those stations for which frames are buffered by
20 setting bits in the virtual bitmap which correspond to the appropriate SIDs.

3.9 Blackout Interval

In the case of systems with a battery-powered base, the base may also need to conserve

its own power. This will involve powering itself down for certain specific intervals. The base can inform the stations when it is going to be powered down. This information is conveyed in a Blackout Interval element carried in a Beacon frame, which identifies the start and end points of the Blackout Interval.

5 Stations will not transmit during the Blackout Interval. If a station does not hear a particular Beacon and consequently does not know the Blackout Interval, it carried in a Beacon frame. For systems which are not concerned with base power management the Blackout Interval can be set so the base is constantly powered and therefore always able to receive a packet. The stations are therefore able to send at anytime except when the base is sending a Beacon. This state is optimal for overall BSS performance.

3.10 Address Assignment

Each station has a unique 24 bit (3 bytes) identifier called it's NodeID. When a station associates with the base, it must first know the ESSID of the base (via a mechanism which is outside the scope of this document; the user can configure the ESSID's of both the station and the base). After receiving an Associate Command, the station RADPAD waits for a Beacon from a base whose ESSID matches the station's assigned ESSID value. When it finds one, the station generates an Associate Request addressed to that base and containing it's own NodeID. The base generates an Associate Response and it serves as the acknowledgment to the station's Associate Request transmission. The Associate Response uses a broadcast destination address field, but is only interpreted by the station with the designated NodeID.

The basic association process is the following sequence. The station determines its ESSID through a process external to this specification and the station ESSID is programmed by

the ESSID Command. After receiving an Associate Command, the station waits for a beacon to find out the BSSID of a base that has been assigned the same ESSID as the station. Then it generates an Associate Request, using the ESSID and BSSID it has discovered, and including its NodeID within the frame body. Base returns an Associate Response to the station with the Beacon Interval within the frame body. This frame is not acknowledged. If the station does not receive an Associate Response, it will retry the Associate Request (up to a configurable maximum number of times).

Station configuration and association information is stored in Non Volatile Memory.

Associations once made, remain valid until the Initialize Command is executed.

When a station may have an assigned ESSID, but doesn't know the frequency, the RADPAD provides the "Find Base Channel" function. This station operation will scan through the available frequency ranges to detect Beacons of the proper ESSID. Once a proper frequency is detected, a station may freely associate with this base.

By design, a station will "associate" with a matching base if not already associated at power on. These "associations" are designed to be persistent from the station's point of view, that is, regardless of Power State, the relation will be preserved. Base's, however, cannot afford to preserve associations across power cycles and will require a re-association at each base power cycle. This operation is only 400-500 milliseconds in duration.

Stations that are associated with one base and relocate to associate with another base within the ESS, will have their original association deleted automatically. This feature of the RADPAD protocol conserves resources and ensures that the repeater/router functionality is reliable.

3.11 Association Management

Any successful communication within a BSS requires an "association" between the station and a base. This association relation provides proper address accessibility, repeater access, timing synchronization, and queued frame announcing. The Station/Base association is, thus a key architectural element in the RADPAD design paradigm. The following paragraphs will describe how this key function is managed within a BSS.

Association is initiated by a station once it receives a Beacon from the appropriate base, i.e., one that is assigned to the proper ESS Service Set. This negotiation "binds" the station to the base and is persistent as long as the station does not explicitly "disassociate", re-associate with another base in the ESS, or the base is rebooted. In this manner, once a station has successfully "associated", this relation endures even across power cycles of the station itself. In the situation where a station is powered down and queued frames are dropped by the base, the association remains active. In an active state, should the station be unable to receive or detect any Beacons from its base, the station will report a communications error.

When a station leaves a BSS and re-associates with another base within the ESS, the new base will announce to it's peers this state change, and the original base (if in the same ESS) will automatically "disassociate" the station. In this manner, a station only has to associate with a base once and the management service functions are the responsibility of the base code.

4. RadPad API

The interface firmware for RADPAD is provided in one of two formats: (a) RS-232 Serial emulation mode (Modal); and (b) PPP frame mode (Modeless). These options are provided to the integrator to select the simplest option for integrating into the target system. For

both interface options, the maximum data frame size is 253 bytes.

The serial emulation provides for the simplest, non-protocol dependent implementation option. Once configured, the RADPAD will behave exactly like a standard asynchronous serial I/O device (such as a modem). The simplicity of this approach is offset by the modality architecture imposed to affect configuration.

The PPP interface option supports a modeless interface, whereby commands and data frames may be freely interleaved. Additionally, this mode provides support for remote configuration, a feature not supported in the serial interface mode.

4.1 Serial Interface Support

If the RADPAD is in data mode, the unit powers up in a data ready mode. Any data transmitted or received in this mode will be treated as data to be transmitted/received between the addressed devices. Data frames will be constructed at transmitted based on either a time basis or on buffer fill conditions. It will be the responsibility of the receiving entity to re-assemble any logical "frame" structures to be processed by the receiving application.

Command mode is activated by transmitting a "break" character to the RADPAD. In this mode all data sent to the RADPAD will be interpreted as a command string and must conform to the syntax described in the following sections. Exiting back to data mode is achieved by issuing the "D/" character sequence.

4.2 PPP Interface Support

The RADPAD system accepts Command and Data frames on its serial port encapsulated in PPP format framing. RADPAD recognizes three RADPAD specified protocols running above PPP:

(a) RadPad Data Protocol (RDP). This protocol is used when application data frames are to be transmitted from the local RadPad to its communications partner. No actions will be invoked by the RadPad other than to reformat the frame and transmit it.

(b) RadPad Command Protocol (RCP). This protocol permits the local host system to issue configuration commands to the RadPad. Content in these frames is strictly for local operations and results in no data being transmitted.

(c) RadPad Remote Command Protocol (RRCP). This protocol affords the RadPad client the ability to configure any other RadPad with which it can communicate. This feature provides a straightforward mechanism for centralized configuration management within a BSS.

4.3 RDP Protocol

The RADPAD system sends any data received on the serial port in RDP frames over the radio to partner configured for the RADPAD. When data frames are received from the radio, the data is encapsulated in RDP frames and sent out through the, serial port.

All RDP and RRCP frames must be no more that 253 bytes in size. There is no fragmentation/defragmentation services provided with the RADPAD. Such functionality will be the responsibility of the RADPAD "host" application. Frames larger than the maximum size will be rejected.

When a RADPAD sends a frame of data on the radio link and receives an acknowledgment for that frame, it will send a plus sign ('+') embedded in an RCP frame out the serial port. If a frame of data is not acknowledged, after the requisite number of MAC retries, then the RADPAD will send an pound sign ('#') embedded in an RCP frame out of the serial port to indicate failure.

4.4 RCP and RRCP Protocols

This section describes the commands and responses used by the RADPAD system. All commands must be embedded in the RCP protocol (to be executed locally) or in the RRCP protocol (to be executed remotely). Responses are embedded in the same protocol format as the command was sent.

Each command is a single ASCII character, followed in some cases by further ASCII characters that act as parameters to the command, terminated by a forward slash. The RADPAD system responds to RADPAD commands with ASCII characters, as described in the subsections below. All commands and parameters are case-insensitive. No command may be more than 16 characters long, although multiple commands may be combined into a single RCP or RRCP frame. If the RADPAD finds 16 characters without a forward slash terminating the command, then it will discard all the characters, and send an ASCII 11 113.

Except as noted in the descriptions of the individual commands, the RADPAD system responds to each command with either an ASCII '0', to indicate that it received a valid command and has acted upon it, or an ASCII '1', to indicate that it did not perform the command, because the command was invalid, because it had invalid parameters, or because the command could not be executed given the current state of the RADPAD. These characters are always enveloped in the RCP or RRCP protocol. The possible error conditions are described with each command in the subsections below.

When a RADPAD sends an RRCP frame on the radio and receives an acknowledgment for that frame, it will send a plus sign ('+') embedded in an RRCP frame out of the serial port. If an RRCP frame is not acknowledged, even after the requisite number of MAC retries, then the

pad will send an pound sign ('#') embedded in an RCP frame out of the serial port to indicate failure.

If a RADPAD loses its association it will send an asterisk ('*') embedded in an RCP frame out of the serial port. Associations are determined as "lost" upon failure to hear five(5) consecutive Beacons or determine that the BSSID has changed since association.

Three configurations are maintained by each RADPAD. The first configuration is stored in nonvolatile memory and is maintained even if power is lost. When the power is applied, the configuration is read from the non-volatile memory and copied into the scratch configuration and the current configuration. Except for the Partner Command and the Mode Command, which change both the scratch configuration and the current configuration, the scratch configuration is the one that is changed by the various configuration commands described in the following subsections. The current configuration is the one that the node is using for its operations. The scratch configuration is copied to the non volatile memory or to the current configuration by the "Use," Command.

5. Electrical Interface Specification

5.1 Pin Assignments

Pin 1: BCC - 5v supply voltage.

Pin 2: GND - 0 volts return ground.

Pin 3: TX Data - TTL level input, a 1 is indicated by a high TTL level. The data rate is 55.55 Kbps +/- 200 ppm.

Pin 4: GND - 0 volts return ground.

Pin 5: RX Data - TTL level output, a 1 is indicated by high TTL level. The data rate is 55.55 Kbps +/- 200 ppm.

Pin 6: Reset - TTL level input, a 0 held for greater than 10 msec. will reset the PAD CPU. Configuration is maintained but data is lost.

5 Pin 7: RTS - TTL level input, the active state is a high TTL level.

Pin 8: DTR - TTL level output.

Pin 9: CTS - TTL level output, the active state is a high TTL level.

Pin 10: Flash Program Enable - must be set low to program the Flash memory and set high or left to float for normal operation. This pin is pulled high on the board.

10 5.2 Power.

The radio requires a 5 volt +/- 5% source. The RadPad in receive mode requires a maximum of 125 mA from BCC. When in transmit mode a maximum of 50 mA is required from BCC. In sleep mode a maximum of 2-3 mA is required from BCC. The BCC noise should be below 100 mV RMS.

15 When running with the RadPad protocol, power consumption is reduced dramatically. Power consumption with the RadPad protocol depends on sleep time and beacon intervals, which are configurable.

6. Mechanical Specification

6.1 Antenna Connector

20 Options exist for an onboard antenna, a coaxial connector or custom connection to a

plated hole. The onboard antenna is located at one end of the radio PCB. The onboard antenna is useful if the antenna can be placed so it effectively radiates away from the device. The coaxial connector is used when a coaxial cable is necessary because of antenna mounting considerations. The end of the PCB has provision for a coaxial connector for antenna attachment. If the coaxial connector is not installed, the antenna can be attached to the PCB hole left vacant by the coaxial connector. This is useful when the antenna can be located close to the radio.

7. RF Signal Specification.

7.1 RF Signal Performance

7.1.1 General

Frequency: 2400 to 2500 MHz

Frequency Control: 1 MHz steps

Data Rate: 50 Kbps

Data Encoding: FM0

Operating Voltage: 5v +/- 5%

RadPad transmit current: 50 mA max.

RadPad receive current: 40 mA max.

RadPad sleep current: 3 mA max.

7.1.2 Transmit Performance

Transmit power level: -4 dBm +3, -5 dB

Center frequency tolerance: +/- 50 kHz max.

Modulation: FSK

Out-of-band emissions: FCC regulations Part 15.247, 15.205, 15.209 in U.S.

ETSI 300-440 in Europe

5 7.1.3 Receive Performance

Sensitivity: -90 dBm for 10^{-4} BER (min signal level)

Center frequency acceptance range: +/- 50 kHz min

Maximum signal: -10 dBm min

Selectivity: 20 dB > +/- 350 kHz min

(except around image) 30 dB > +/- 500 kHz min

7.1.4 Timing

Sleep to Idle: 10 msec max.

Transmit to Receive: 5 msec max.

Receive to Transmit: 5 msec max.

15 7.3 Range

In addition to the radio specifications range depends on the environment and the antenna.

Typical range observed for the onboard antenna in an open environment is 50+ feet. Use of a high-gain antenna provides an extension of the range to 75-100 ft range.

While one detailed embodiment of the second-tier base station and the corresponding

second-tier communication module is described above in detail, other relatively short range radios could also be used. For example, Bluetooth radios promise to provide short-range wireless peer-to-peer connectivity. Bluetooth is a standard under development among a group of computer and telecommunications industry leaders, including Intel, IBM, Toshiba, Ericsson and
5 Nokia. A draft of the Specification of the Bluetooth System, v. 0.8 (January 22, 1999) is herein incorporated by reference. Additional information on Bluetooth may be obtained at the website, www.bluetooth.com. If line of sight conditions exist (often the case), infrared communications can also facilitate this type of peer to peer network.

FIGs. 9-13 provide further details of the RADPAD system used in this invention.

Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims.

WHAT IS CLAIMED IS:

1. A multi-tier system for digital radio communication, comprising:
 - a first-tier base station comprising a first radio transceiver operating in accordance with a first communication protocol, said first-tier base station connected to a local area network ("LAN");
 - a second-tier base station comprising a second radio transceiver operating in accordance with a second communication protocol independent of said first communication protocol and said second-tier base station connected to said first-tier base station;
 - a first-tier remote unit wirelessly connected to said first-tier base station through said first radio transceiver; and
 - a second-tier remote unit wirelessly connected to said second-tier base station through said second radio transceiver.
2. The system of claim 1, wherein said first-tier remote unit or second-tier remote unit comprises a data collection device.
3. The system of claim 2, wherein said first-tier remote unit or second-tier remote unit comprises a bar code reader or an RFID reader.
4. The system of claim 1, wherein said first-tier remote unit or second-tier remote unit comprises a vending machine.

5. The system of claim 1, wherein said first-tier remote unit or second-tier remote unit comprises a pager.

6. The system of claim 1, wherein said first-tier remote unit or second-tier remote unit comprises a door lock.

6. The system of claim 1, wherein said first-tier remote unit or second-tier remote unit comprises a computer peripheral.

7. The system of claim 1, wherein said first-tier remote unit or second-tier remote unit comprises a computer peripheral selected from the group comprising a printer, modem, handheld terminal, point of sale station, and other serial or parallel devices.

8. The system of claim 1, wherein said second-tier base station is wirelessly connected to said first-tier base station.

9. The system of claim 1, wherein said first-tier base station is wirelessly connected to the LAN.

10. The system of claim 1, wherein said second-tier base station is connected to said first-tier base station through a serial port.

11. The system of claim 1, further comprising:

another second-tier base station wirelessly connected to said second-tier base station.

12. A multi-tier system for digital packet radio communication, comprising:

a host connected to a local area network;

a first-tier base station connected to said host through the local area network, said first-tier base station comprising a first radio transceiver for spread spectrum radio transmission in accordance with a first communication protocol;

a second-tier base station comprising a second radio transceiver operating in accordance with a second communication protocol independent of said first communication protocol and said second-tier base station connected to said first-tier base station;

a remote unit wirelessly connected to said second-tier base station through said second radio transceiver.

13. The system of claim 12, further comprising:

an enclosure containing both said first-tier base station and said second-tier base station.

14. The system of claim 12, further comprising:

another second-tier base station wirelessly connected to said second-tier base station.

15. A multi-tier system for digital packet radio communication, comprising:

a host connected to a local area network;

a first-tier base station connected to said host through the local area network, said first-tier base station comprising a first-tier radio transceiver for spread spectrum radio transmission in accordance with a first communication protocol;

a second-tier base station comprising a second-tier radio transceiver operating in accordance with a second communication protocol independent of said first communication protocol and said second-tier base station connected to said first-tier base station;

another second-tier base station comprising another second-tier radio transceiver communicating in accordance with said second communication protocol and said another second-tier base station connected to said second-tier base station; and

a remote unit wirelessly connected to said another second-tier base station through said another second-tier radio transceiver.

16. The system of claim 15, further comprising:

additional one or more second-tier base stations connected wirelessly to said first second-tier base station, each of said one or more second-tier base stations comprising a second-tier radio transceiver operating in accordance with said second communication protocol.

17. The system of claim 15, further comprising:

a plurality of additional second-tier base stations connected wirelessly and serially to said first second-tier base station, each of said additional second-tier base stations comprising a second-tier radio transceiver operating in accordance with said second communication protocol.

18. A system for remotely controlling door locks, comprising:

a host connected to a local area network, said host including a database of information identifying one or more door locks and sending command signals to said one or more door locks;

a first-tier base station connected to said host through the local area network, said first-tier base station comprising a first radio transceiver for spread spectrum radio transmission of said command signals in accordance with a first communication protocol;

a second-tier base station for transmission of said command and monitor signals, said second-tier base station comprising a second radio transceiver operating in accordance with a second communication protocol independent of said first communication protocol and said second-tier base station connected to said first-tier base station; and

said one or more remote door lock units wirelessly connected to said second-tier base station through said second radio transceiver, said door lock unit operating in response to said command signals from said host.

19. The system in accordance with claim 18, wherein said remote door lock unit comprises a sensor for monitoring door status information.

20. The system in accordance with claim 19, wherein said status information includes whether the door is open or closed.

21. The system in accordance with claim 19, wherein said status information includes the times of entry and/or exit.

22. The system in accordance with claim 19, wherein said status information is transmitted back to the host through said first-tier and second-tier base stations.

23. A system for remotely controlling remote individual room temperature control units, comprising:

a host connected to a local area network, said host including a database of information identifying one or more remote room temperature control units and sending command signals to said one or more remote room temperature control units;

a first-tier base station connected to said host through the local area network, said first-tier base station comprising a first radio transceiver for spread spectrum radio transmission of said command signals in accordance with a first communication protocol;

a second-tier base station for transmission of said command and monitor signals, said second-tier base station comprising a second radio transceiver operating in accordance with a second communication protocol independent of said first communication protocol and said second-tier base station connected to said first-tier base station; and

said one or more remote room temperature control units wirelessly connected to said second-tier base station through said second radio transceiver, said control units operating in response to said command signals from said host.

24. The system in accordance with claim 23, wherein said one or more remote room temperature control unit includes a sensor for monitoring room temperature and said room

temperature information is relayed back to the host through said first-tier and second-tier base stations.

25. A base station system, comprising:

a base station for receiving radio signals and a wired connection to a local area network (LAN);

an enclosure covering said base station with a building information sign.

26. The base station system of claim 25, wherein said building information sign is an EXIT sign.

27. The base station system of claim 25, wherein said building information sign is STAIRS sign.

28. A wireless network of customer inquiry stations, comprising:

one or more customer inquiry stations, each having a radio module for communication;

a second-tier base station for transmission of customer inquiry related data for wireless connection with said one or more customer inquiry stations;

a first-tier base station for transmission of customer inquiry related data for wireless connection with said second-tier base station;

a host with a program for processing and generating customer inquiry related

data, said host connected to said first-tier base station.

29. The wireless network of claim 28, wherein said customer inquiry related data is customer price inquiry on an item.

30. The wireless network of claim 28, wherein said customer inquiry stations comprise an automatic identification reader.

31. The wireless network of claim 30, wherein said automatic identification reader comprises a bar code reader.

32. The wireless network of claim 30, wherein said automatic identification reader comprises a radio frequency identification reader.

ABSTRACT

Multi-tier system for digital radio communication. The multi-tier system has a first-tier base station with relatively long-range radio and has a second-tier base station with relatively short-range, low power and cheaper radios. The system can be more versatily configured to meet demands of various applications. The application may include data capture using bar code readers, radio frequency readers and other automatic data capture devices. The system may also be used to control hotel door locks, individual room temperature control, remote video monitoring -- all without having to wire and with much flexibility given the two types of radios employed.

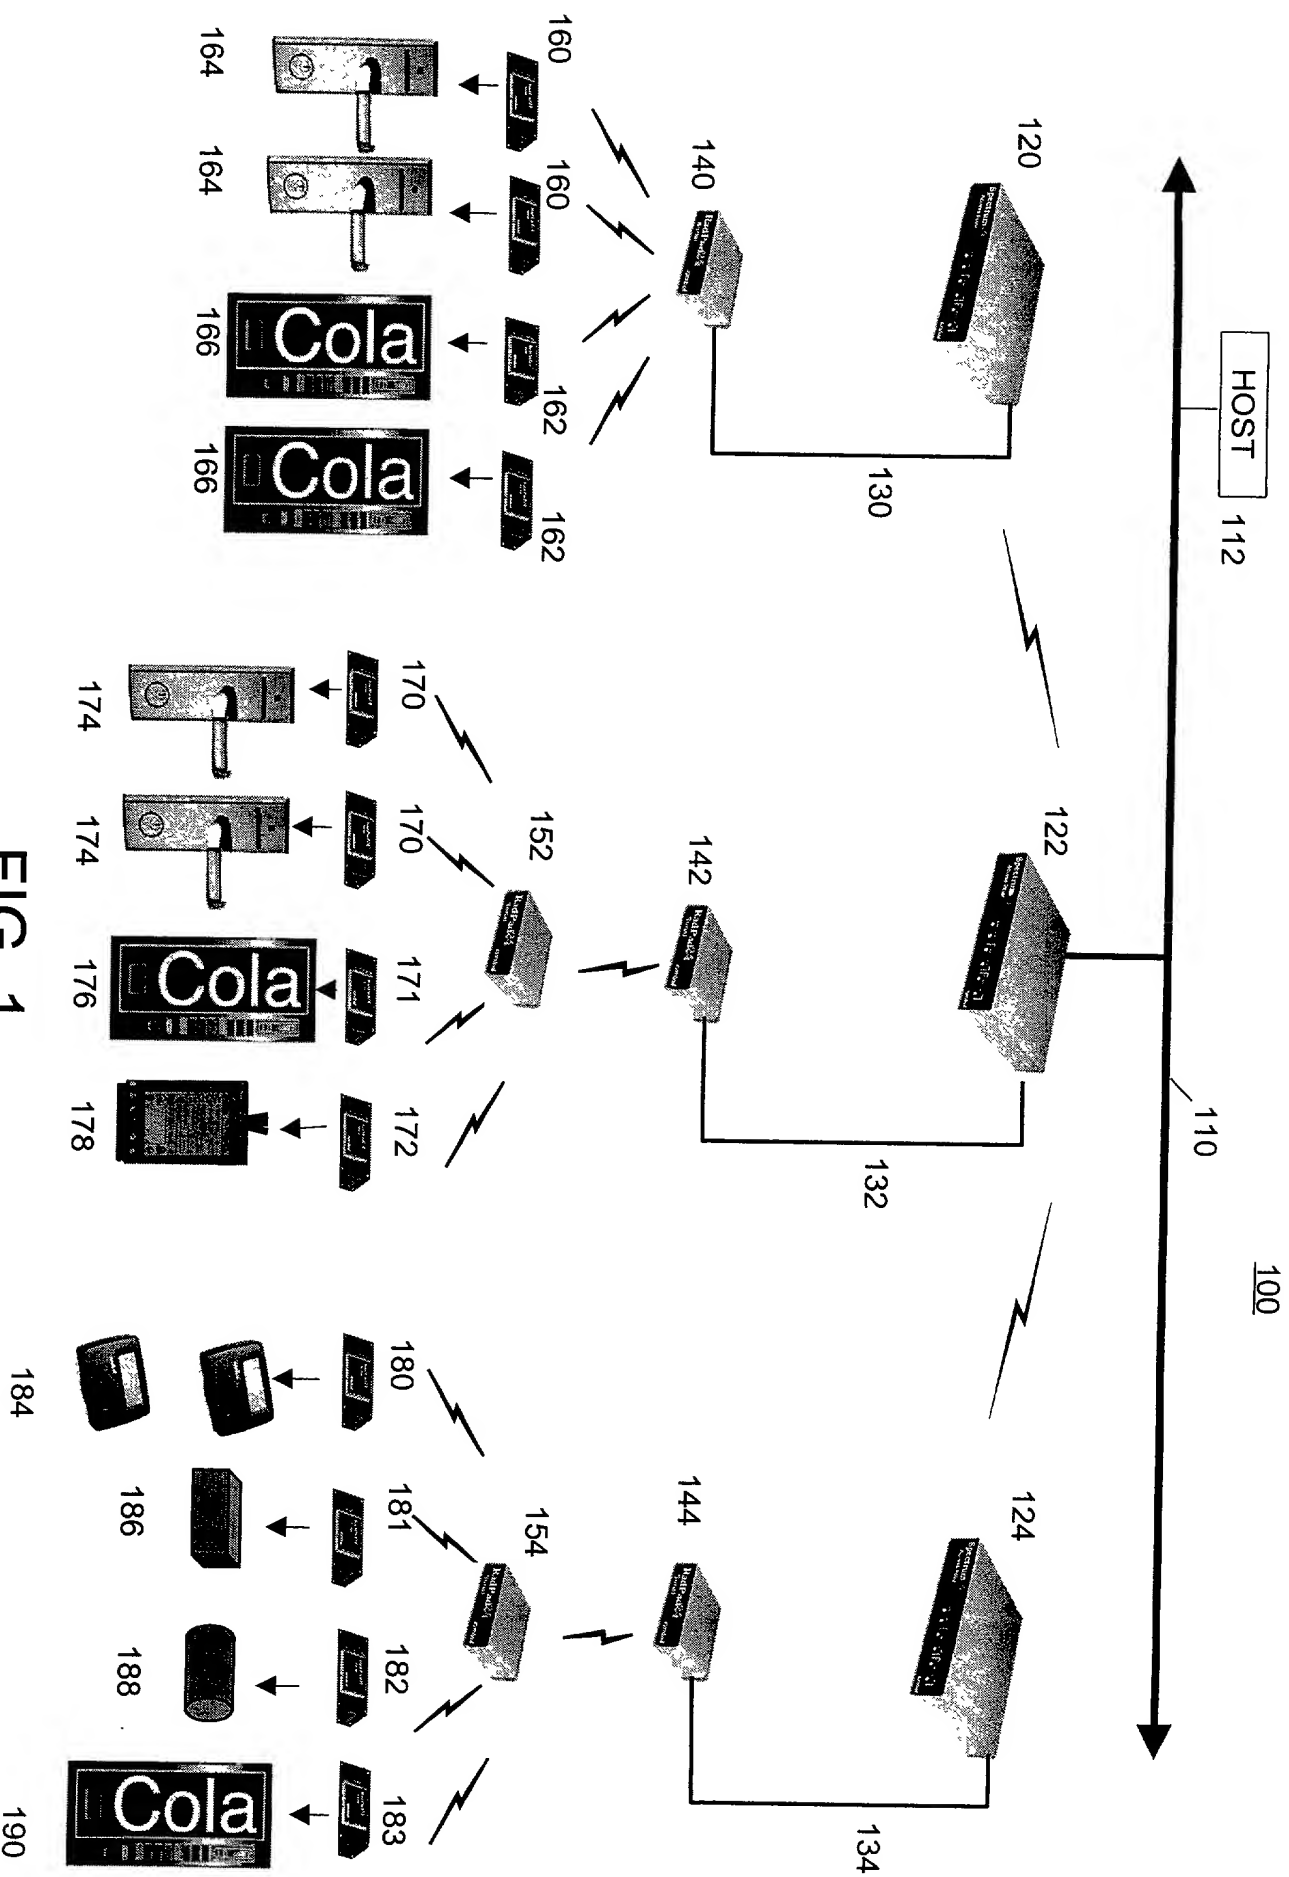


FIG. 1

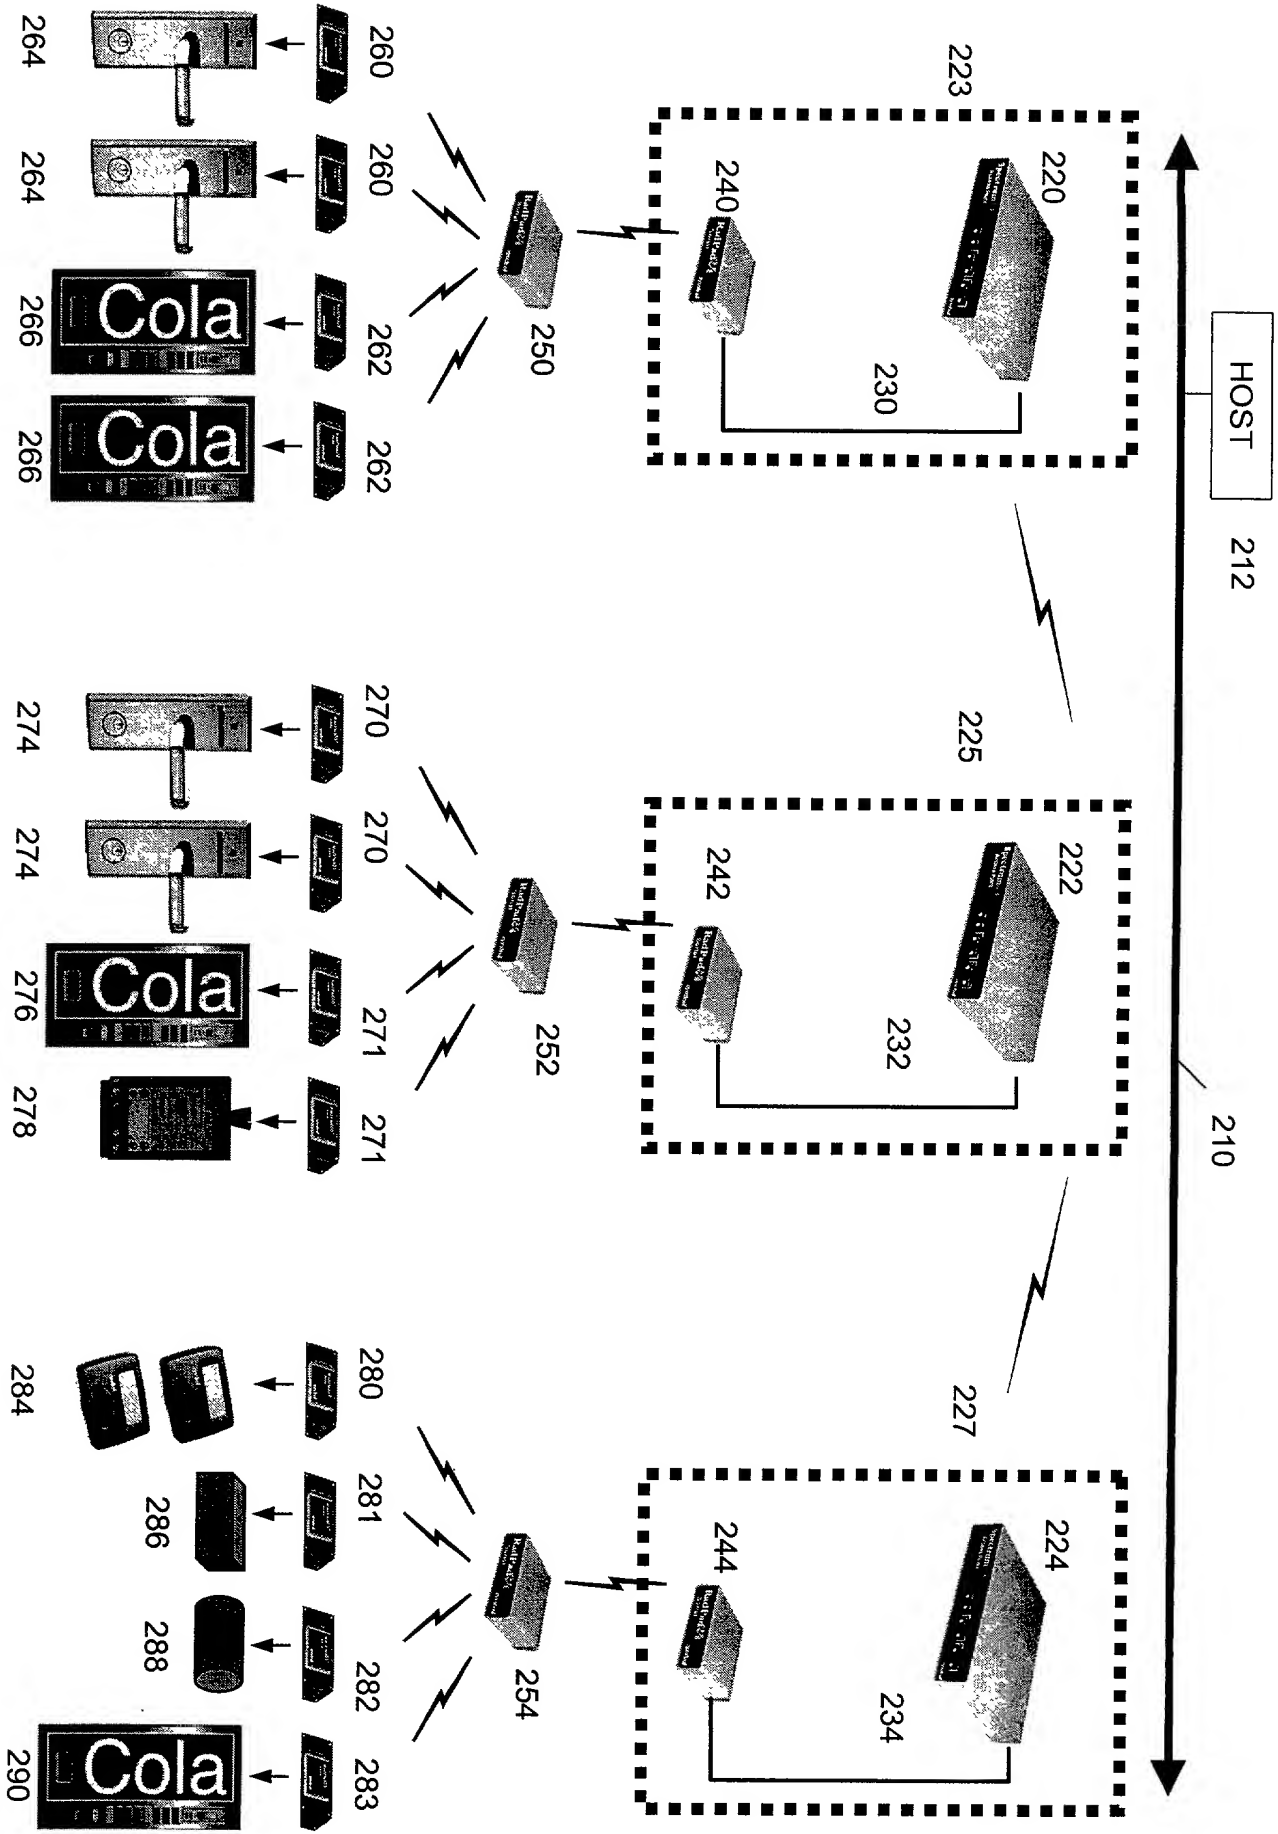
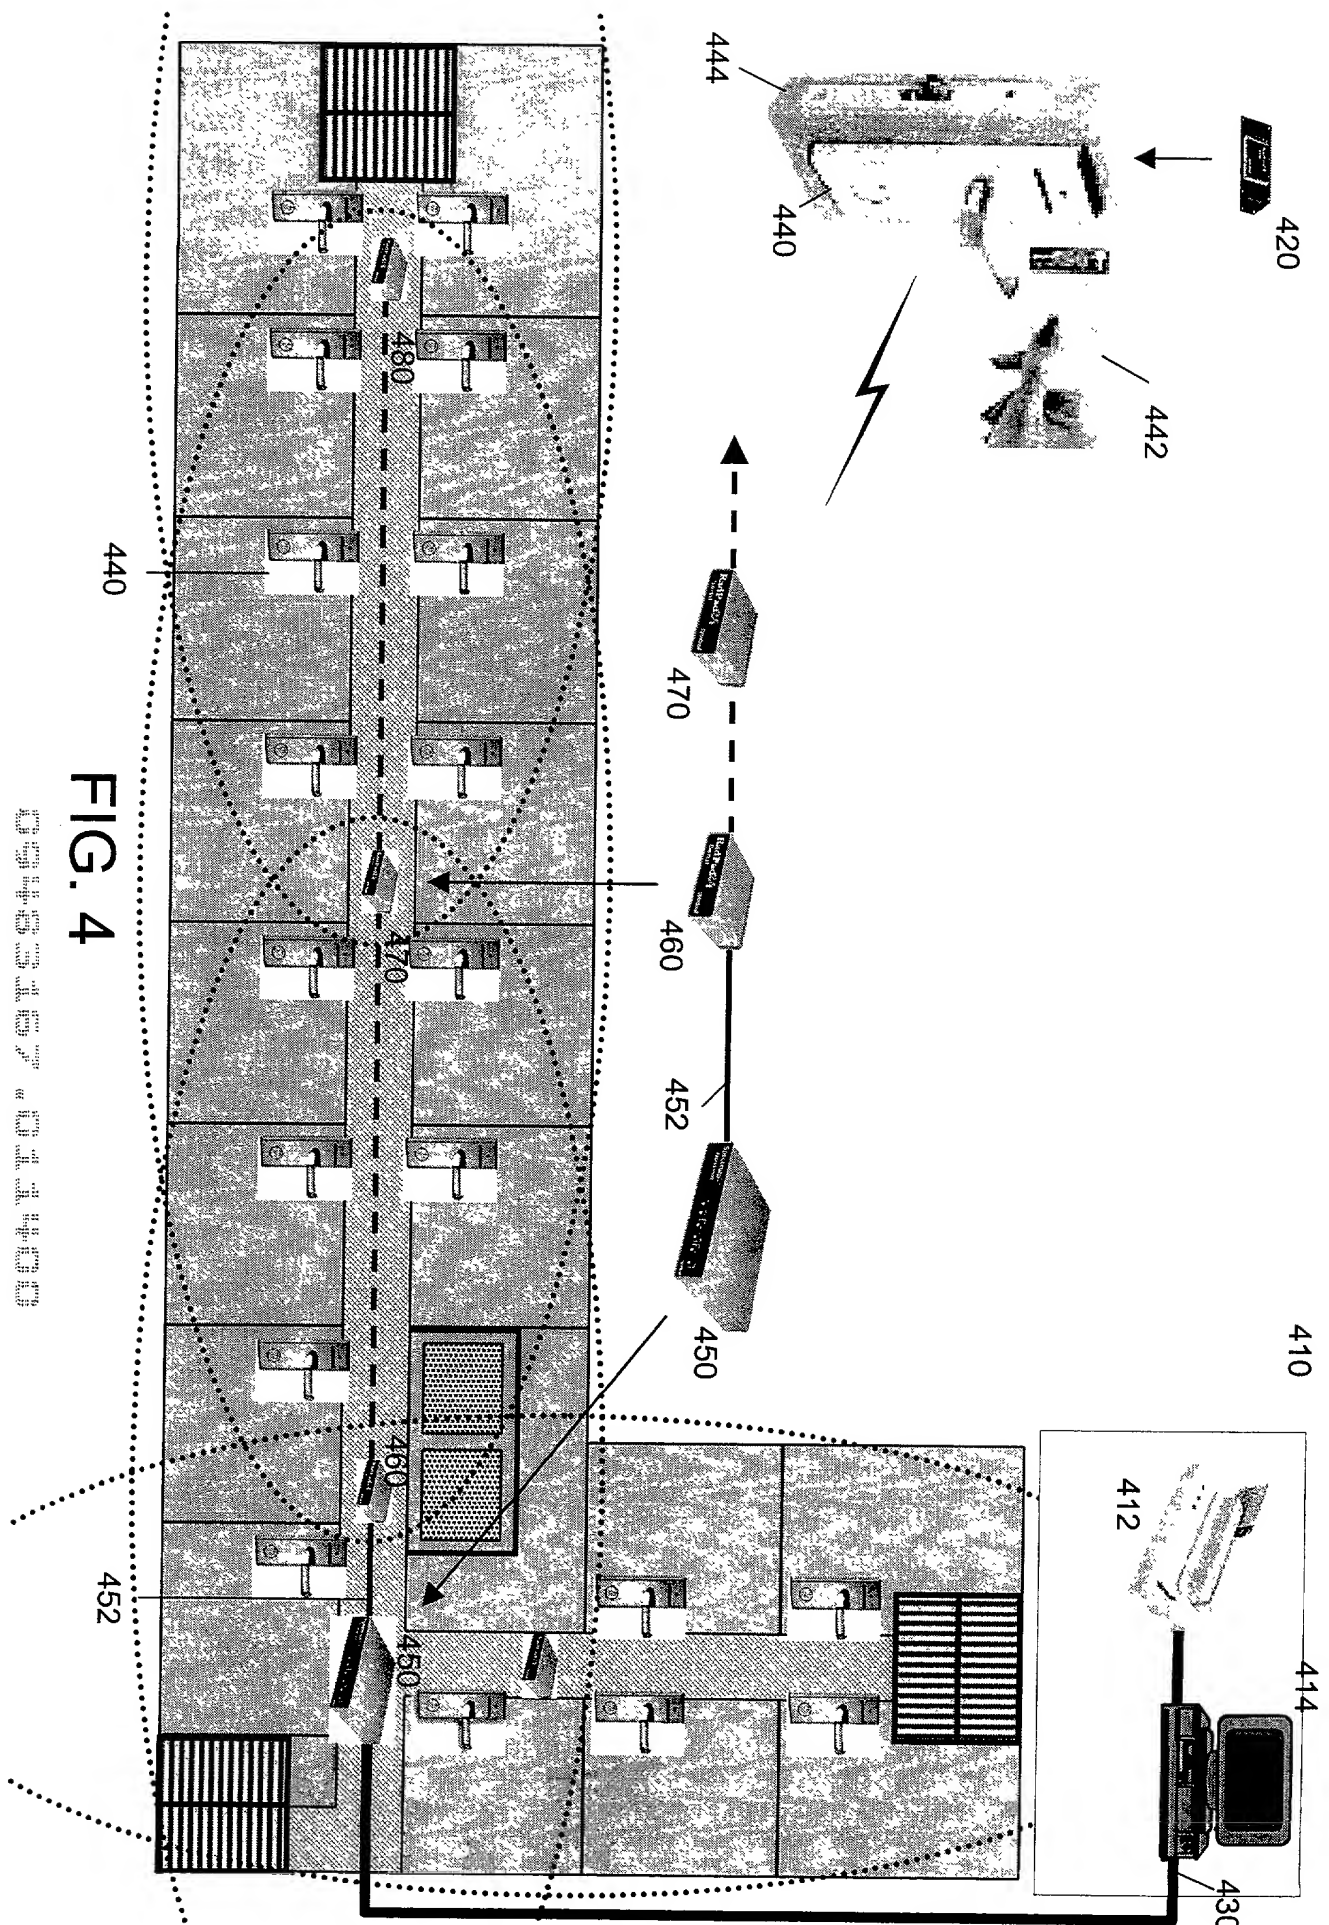


FIG. 2

FIG. 2 is a schematic diagram of a network architecture.



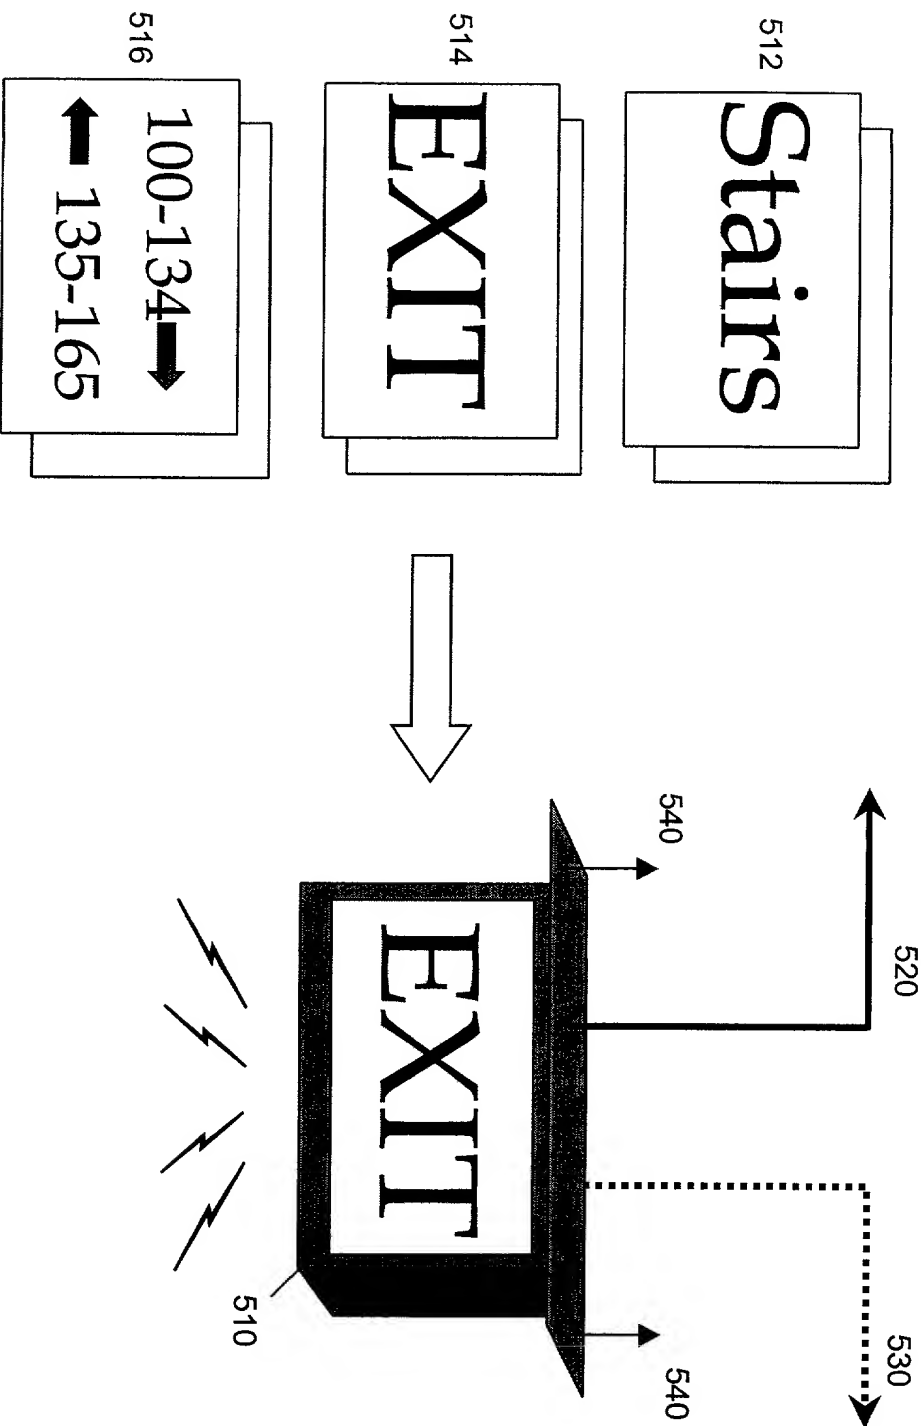


FIG. 5

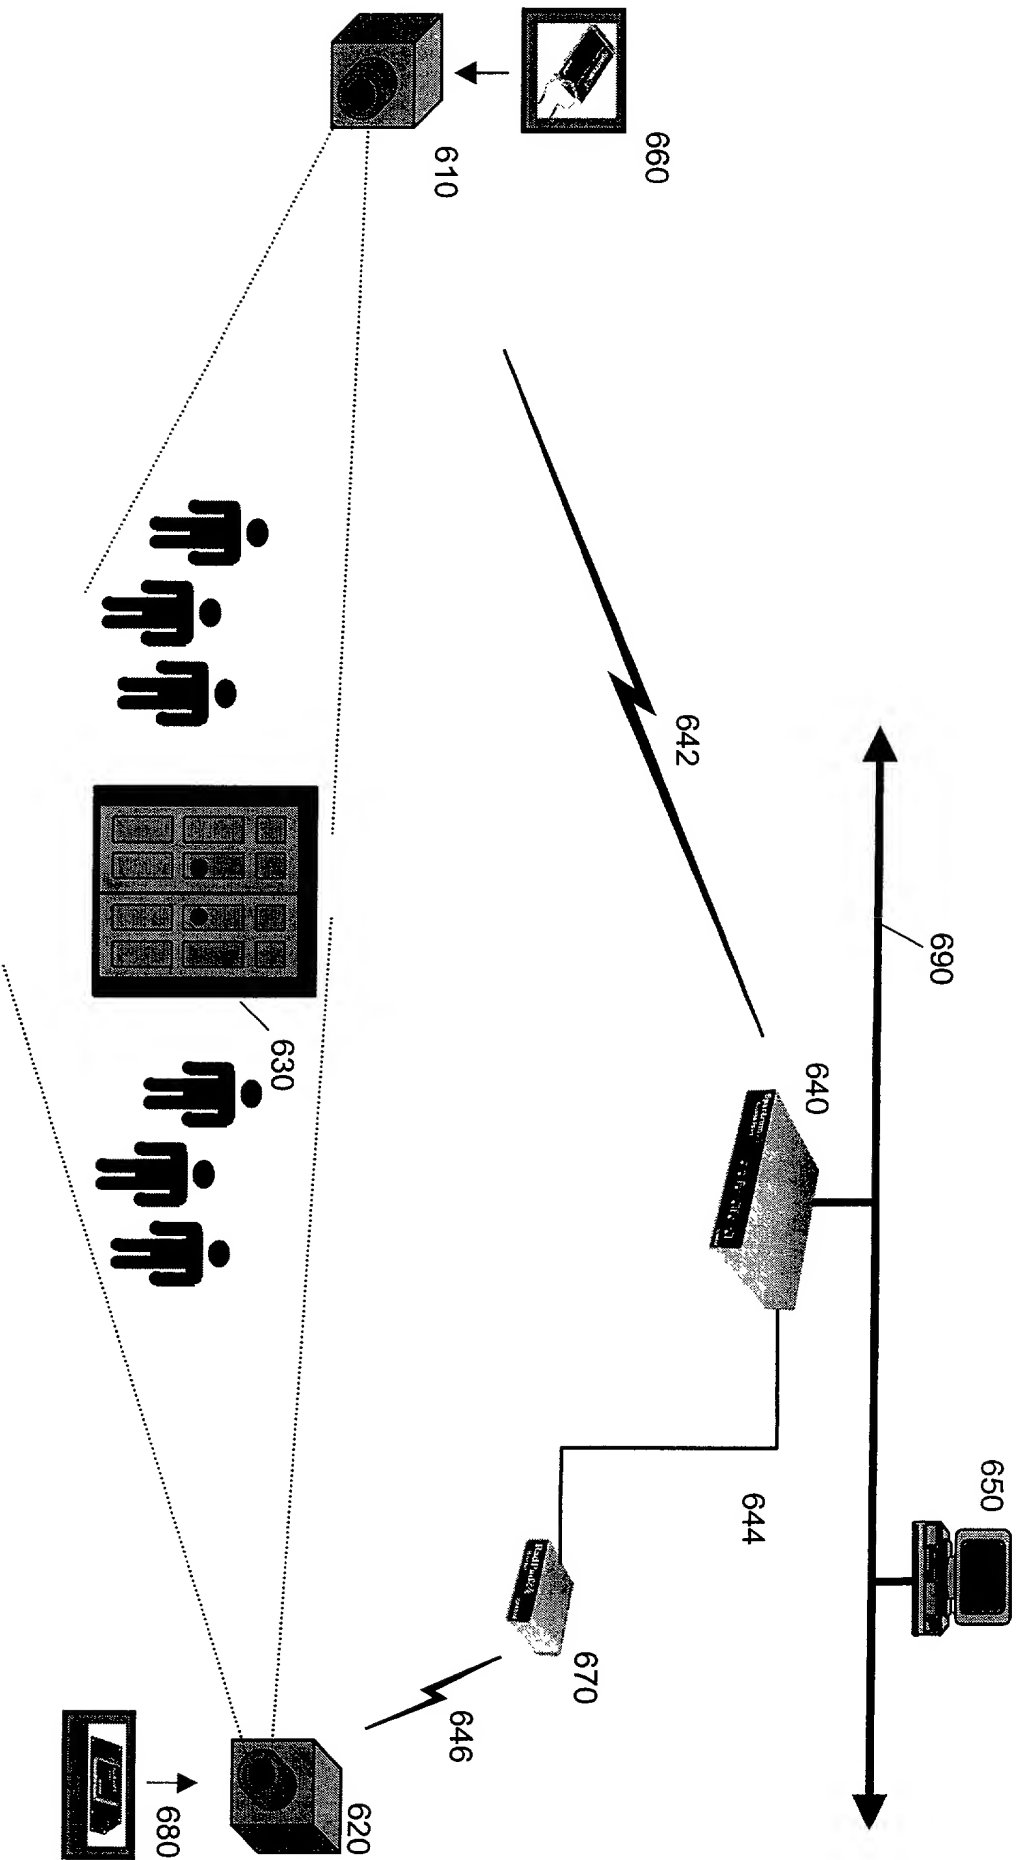


FIG. 6

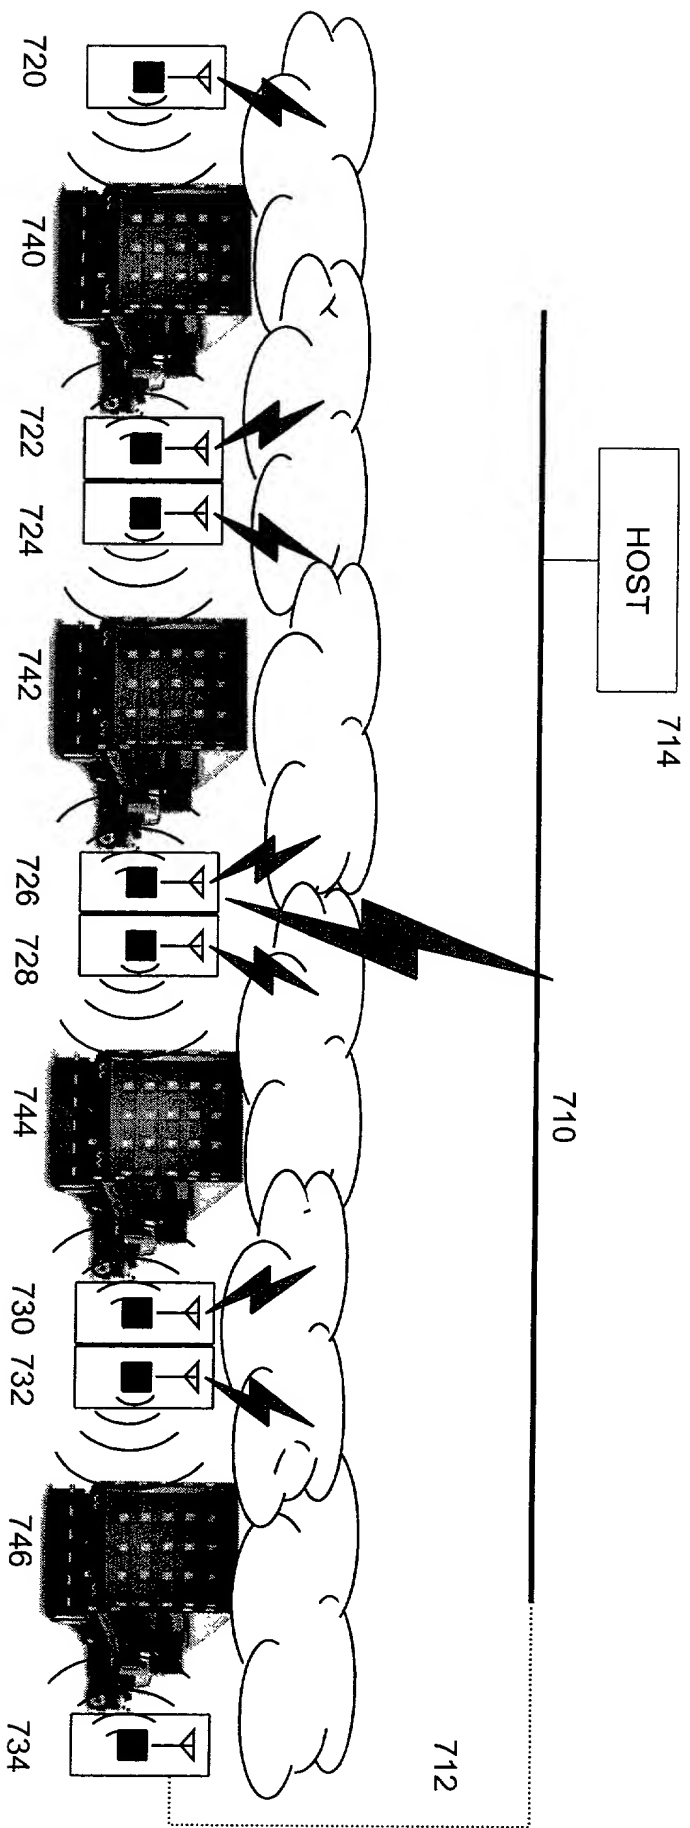


FIG. 7

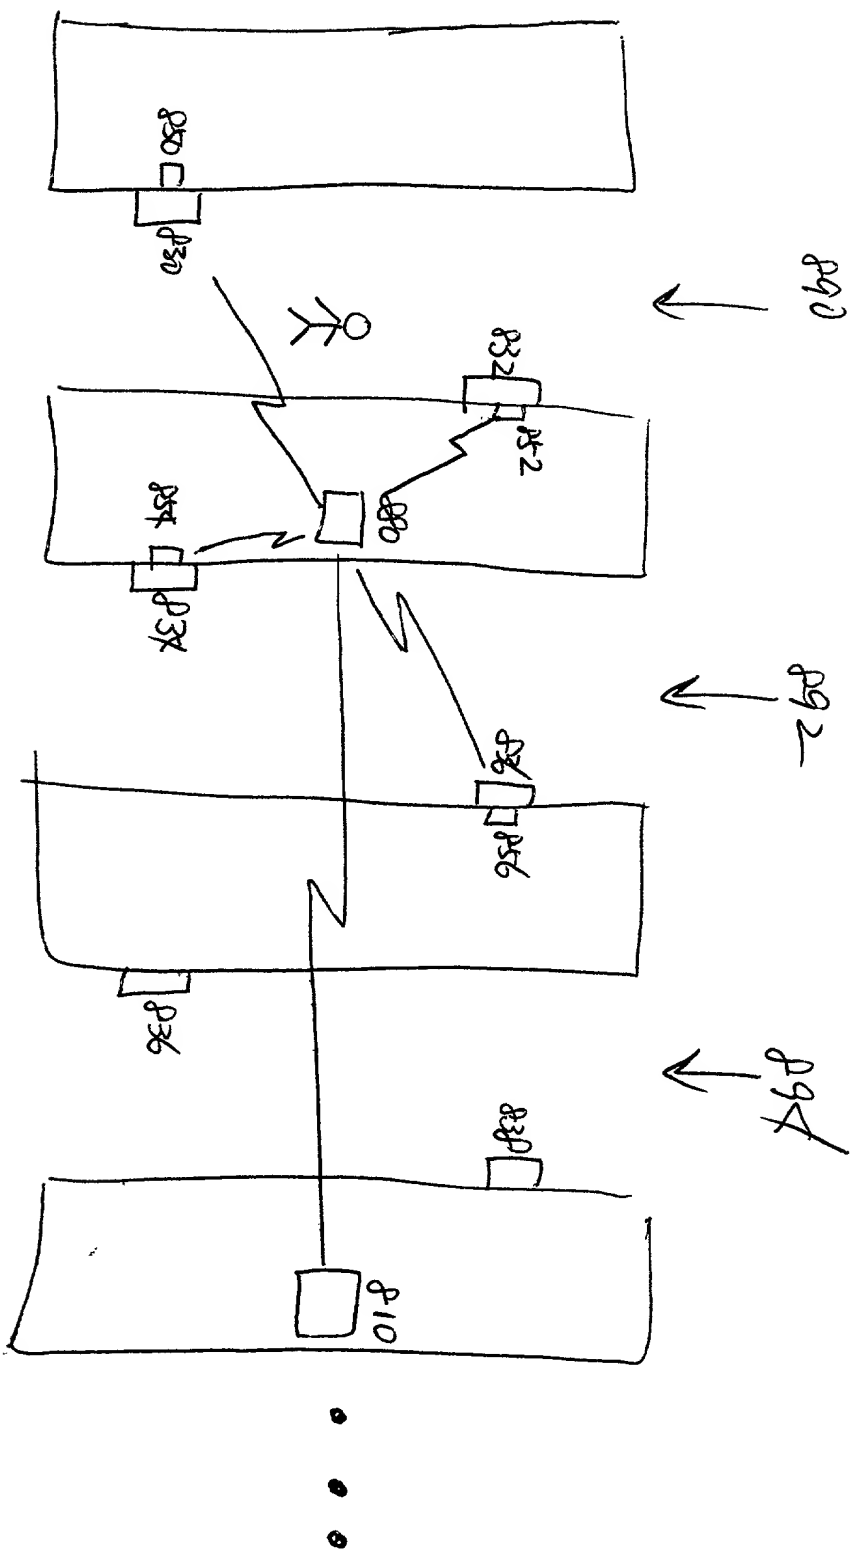


FIG. 8

FIG. 8 is a schematic diagram of a system 800 in accordance with one embodiment of the present invention. The system 800 includes a first unit 810, a second unit 820, a third unit 830, and a fourth unit 840. The first unit 810 is connected to the second unit 820, which is connected to the third unit 830, which is connected to the fourth unit 840. The first unit 810 includes a first component 812, a second component 814, and a third component 816. The second unit 820 includes a fourth component 822, a fifth component 824, and a sixth component 826. The third unit 830 includes a seventh component 832, an eighth component 834, and a ninth component 836. The fourth unit 840 includes a tenth component 842, an eleventh component 844, and a twelfth component 846. The first component 812 is connected to the fourth component 822, which is connected to the seventh component 832, which is connected to the tenth component 842. The second component 814 is connected to the fifth component 824, which is connected to the eighth component 834, which is connected to the eleventh component 844. The third component 816 is connected to the sixth component 826, which is connected to the ninth component 836, which is connected to the twelfth component 846. The system 800 is configured to perform a method 802, which includes a first step 804, a second step 806, a third step 808, and a fourth step 810. The first step 804 includes a first sub-step 804a, a second sub-step 804b, and a third sub-step 804c. The second step 806 includes a fourth sub-step 806a, a fifth sub-step 806b, and a sixth sub-step 806c. The third step 808 includes a seventh sub-step 808a, an eighth sub-step 808b, and a ninth sub-step 808c. The fourth step 810 includes a tenth sub-step 810a, an eleventh sub-step 810b, and a twelfth sub-step 810c. The method 802 is configured to perform a first operation 802a, a second operation 802b, a third operation 802c, and a fourth operation 802d. The first operation 802a includes a first sub-operation 802a1, a second sub-operation 802a2, and a third sub-operation 802a3. The second operation 802b includes a fourth sub-operation 802b1, a fifth sub-operation 802b2, and a sixth sub-operation 802b3. The third operation 802c includes a seventh sub-operation 802c1, an eighth sub-operation 802c2, and a ninth sub-operation 802c3. The fourth operation 802d includes a tenth sub-operation 802d1, an eleventh sub-operation 802d2, and a twelfth sub-operation 802d3. The system 800 is configured to perform the method 802 in a first mode 802a, a second mode 802b, a third mode 802c, and a fourth mode 802d. The first mode 802a includes a first sub-mode 802a1, a second sub-mode 802a2, and a third sub-mode 802a3. The second mode 802b includes a fourth sub-mode 802b1, a fifth sub-mode 802b2, and a sixth sub-mode 802b3. The third mode 802c includes a seventh sub-mode 802c1, an eighth sub-mode 802c2, and a ninth sub-mode 802c3. The fourth mode 802d includes a tenth sub-mode 802d1, an eleventh sub-mode 802d2, and a twelfth sub-mode 802d3. The system 800 is configured to perform the method 802 in a first configuration 802a, a second configuration 802b, a third configuration 802c, and a fourth configuration 802d. The first configuration 802a includes a first sub-configuration 802a1, a second sub-configuration 802a2, and a third sub-configuration 802a3. The second configuration 802b includes a fourth sub-configuration 802b1, a fifth sub-configuration 802b2, and a sixth sub-configuration 802b3. The third configuration 802c includes a seventh sub-configuration 802c1, an eighth sub-configuration 802c2, and a ninth sub-configuration 802c3. The fourth configuration 802d includes a tenth sub-configuration 802d1, an eleventh sub-configuration 802d2, and a twelfth sub-configuration 802d3. The system 800 is configured to perform the method 802 in a first state 802a, a second state 802b, a third state 802c, and a fourth state 802d. The first state 802a includes a first sub-state 802a1, a second sub-state 802a2, and a third sub-state 802a3. The second state 802b includes a fourth sub-state 802b1, a fifth sub-state 802b2, and a sixth sub-state 802b3. The third state 802c includes a seventh sub-state 802c1, an eighth sub-state 802c2, and a ninth sub-state 802c3. The fourth state 802d includes a tenth sub-state 802d1, an eleventh sub-state 802d2, and a twelfth sub-state 802d3. The system 800 is configured to perform the method 802 in a first mode 802a, a second mode 802b, a third mode 802c, and a fourth mode 802d. The first mode 802a includes a first sub-mode 802a1, a second sub-mode 802a2, and a third sub-mode 802a3. The second mode 802b includes a fourth sub-mode 802b1, a fifth sub-mode 802b2, and a sixth sub-mode 802b3. The third mode 802c includes a seventh sub-mode 802c1, an eighth sub-mode 802c2, and a ninth sub-mode 802c3. The fourth mode 802d includes a tenth sub-mode 802d1, an eleventh sub-mode 802d2, and a twelfth sub-mode 802d3. The system 800 is configured to perform the method 802 in a first configuration 802a, a second configuration 802b, a third configuration 802c, and a fourth configuration 802d. The first configuration 802a includes a first sub-configuration 802a1, a second sub-configuration 802a2, and a third sub-configuration 802a3. The second configuration 802b includes a fourth sub-configuration 802b1, a fifth sub-configuration 802b2, and a sixth sub-configuration 802b3. The third configuration 802c includes a seventh sub-configuration 802c1, an eighth sub-configuration 802c2, and a ninth sub-configuration 802c3. The fourth configuration 802d includes a tenth sub-configuration 802d1, an eleventh sub-configuration 802d2, and a twelfth sub-configuration 802d3. The system 800 is configured to perform the method 802 in a first state 802a, a second state 802b, a third state 802c, and a fourth state 802d. The first state 802a includes a first sub-state 802a1, a second sub-state 802a2, and a third sub-state 802a3. The second state 802b includes a fourth sub-state 802b1, a fifth sub-state 802b2, and a sixth sub-state 802b3. The third state 802c includes a seventh sub-state 802c1, an eighth sub-state 802c2, and a ninth sub-state 802c3. The fourth state 802d includes a tenth sub-state 802d1, an eleventh sub-state 802d2, and a twelfth sub-state 802d3.

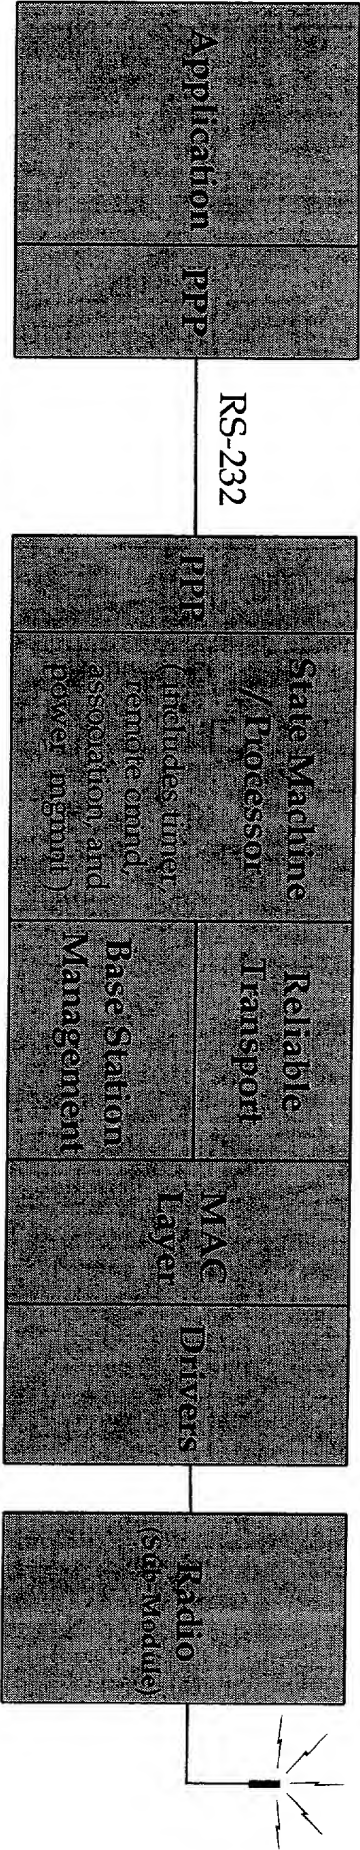


FIG. 9

FIG. 9 is a block diagram of a system architecture for a wireless communication system. The system includes an Application and PPP block, a central State Machine / Processor block, a Reliable Transport block, a Base Station Management block, a MAC Layer block, a Drivers block, and a Radio (Sub-Module) block. The Application and PPP block is connected to the State Machine / Processor block via an RS-232 connection. The State Machine / Processor block is connected to the Reliable Transport block, which is connected to the Base Station Management block. The Base Station Management block is connected to the MAC Layer block, which is connected to the Drivers block. The Drivers block is connected to the Radio (Sub-Module) block, which is connected to an antenna.

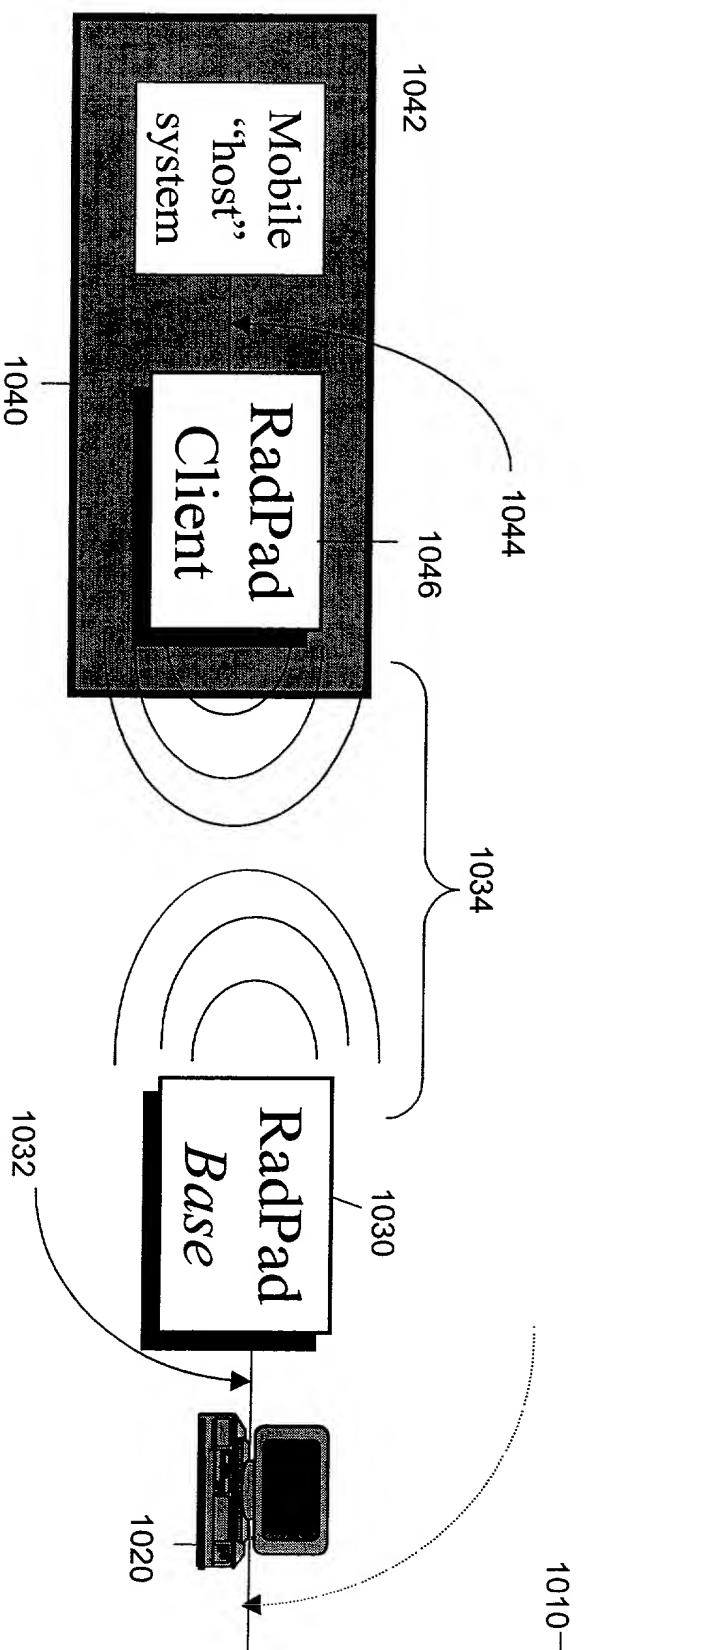


FIG. 10

[illegible]

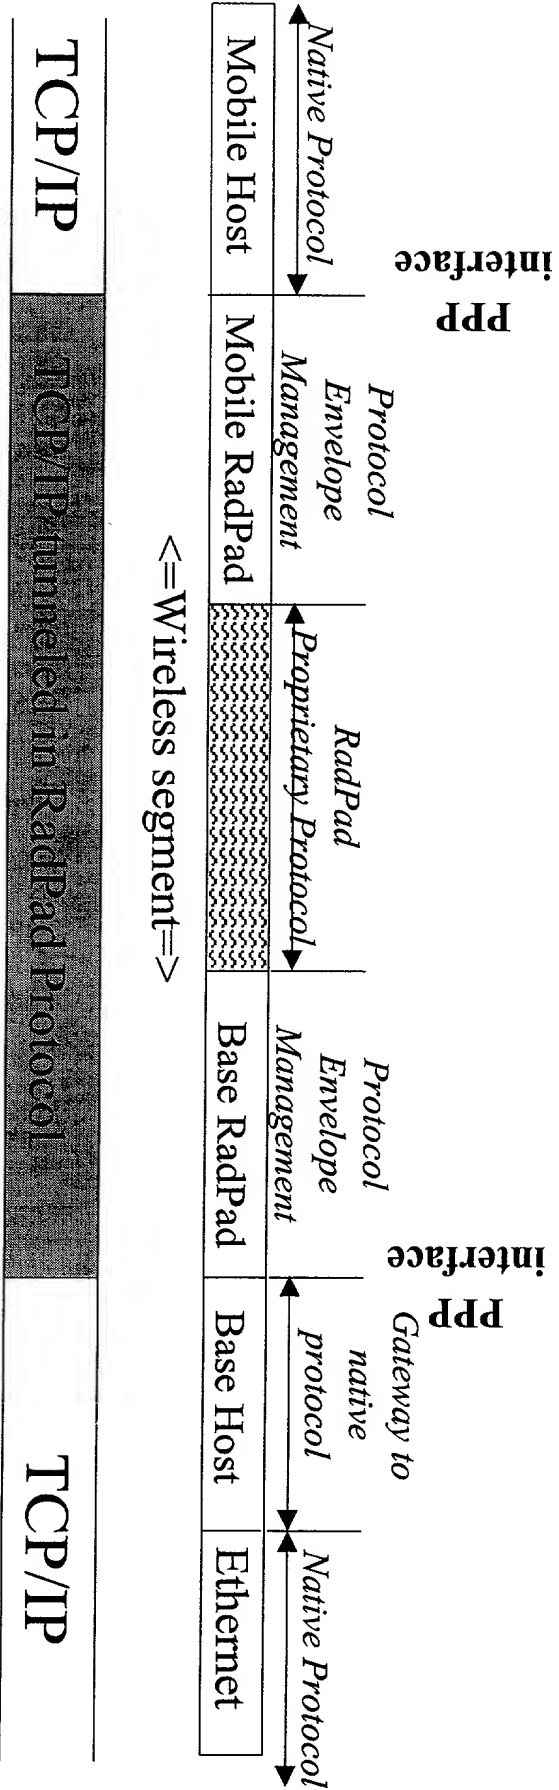


FIG. 11

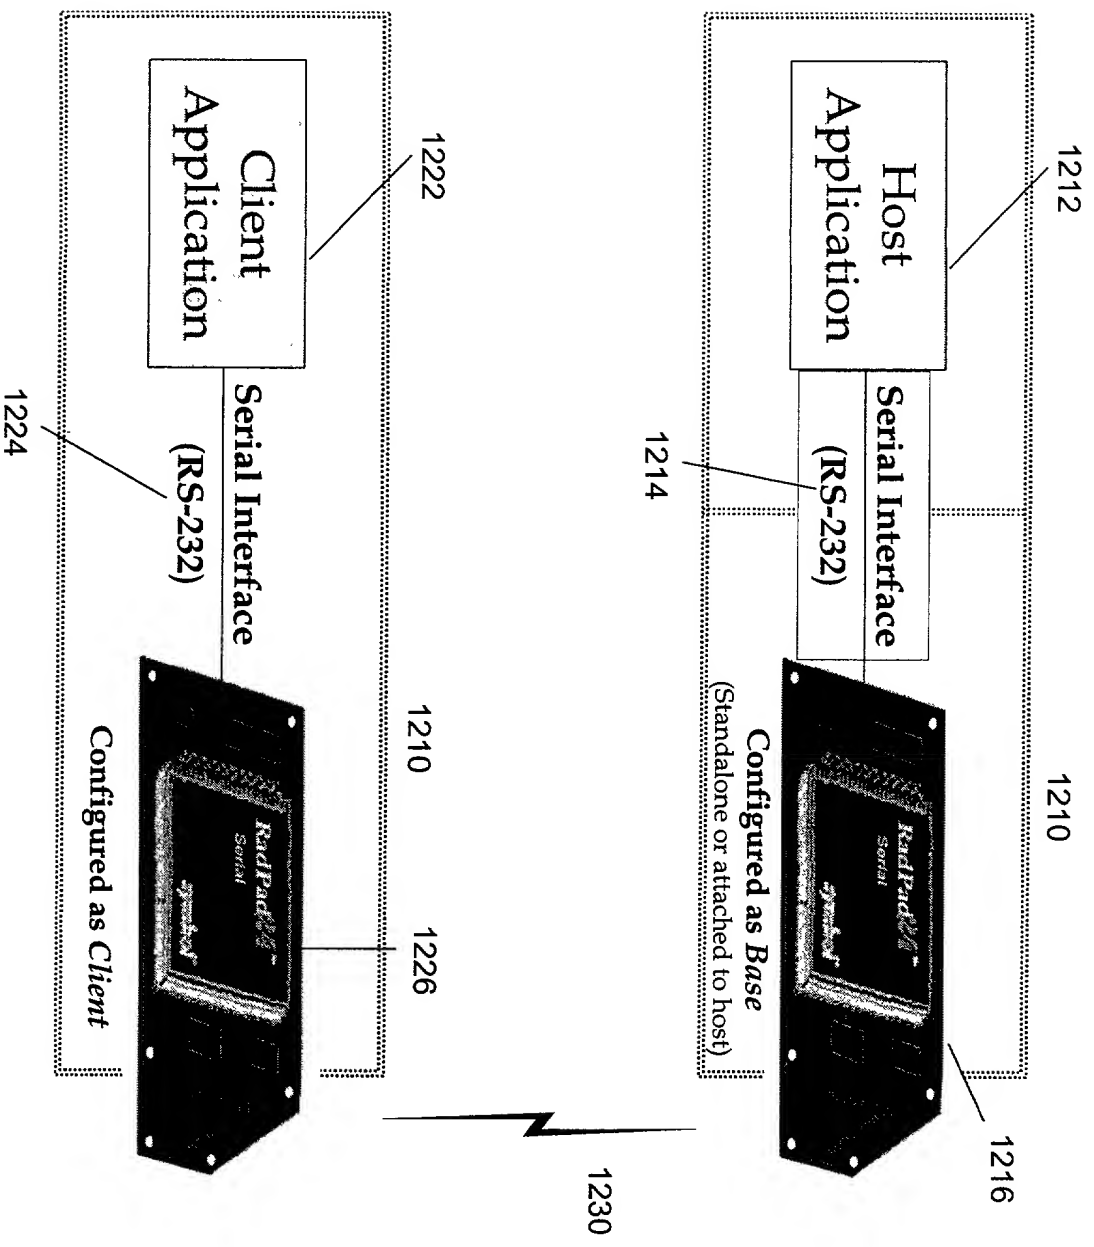


FIG. 12

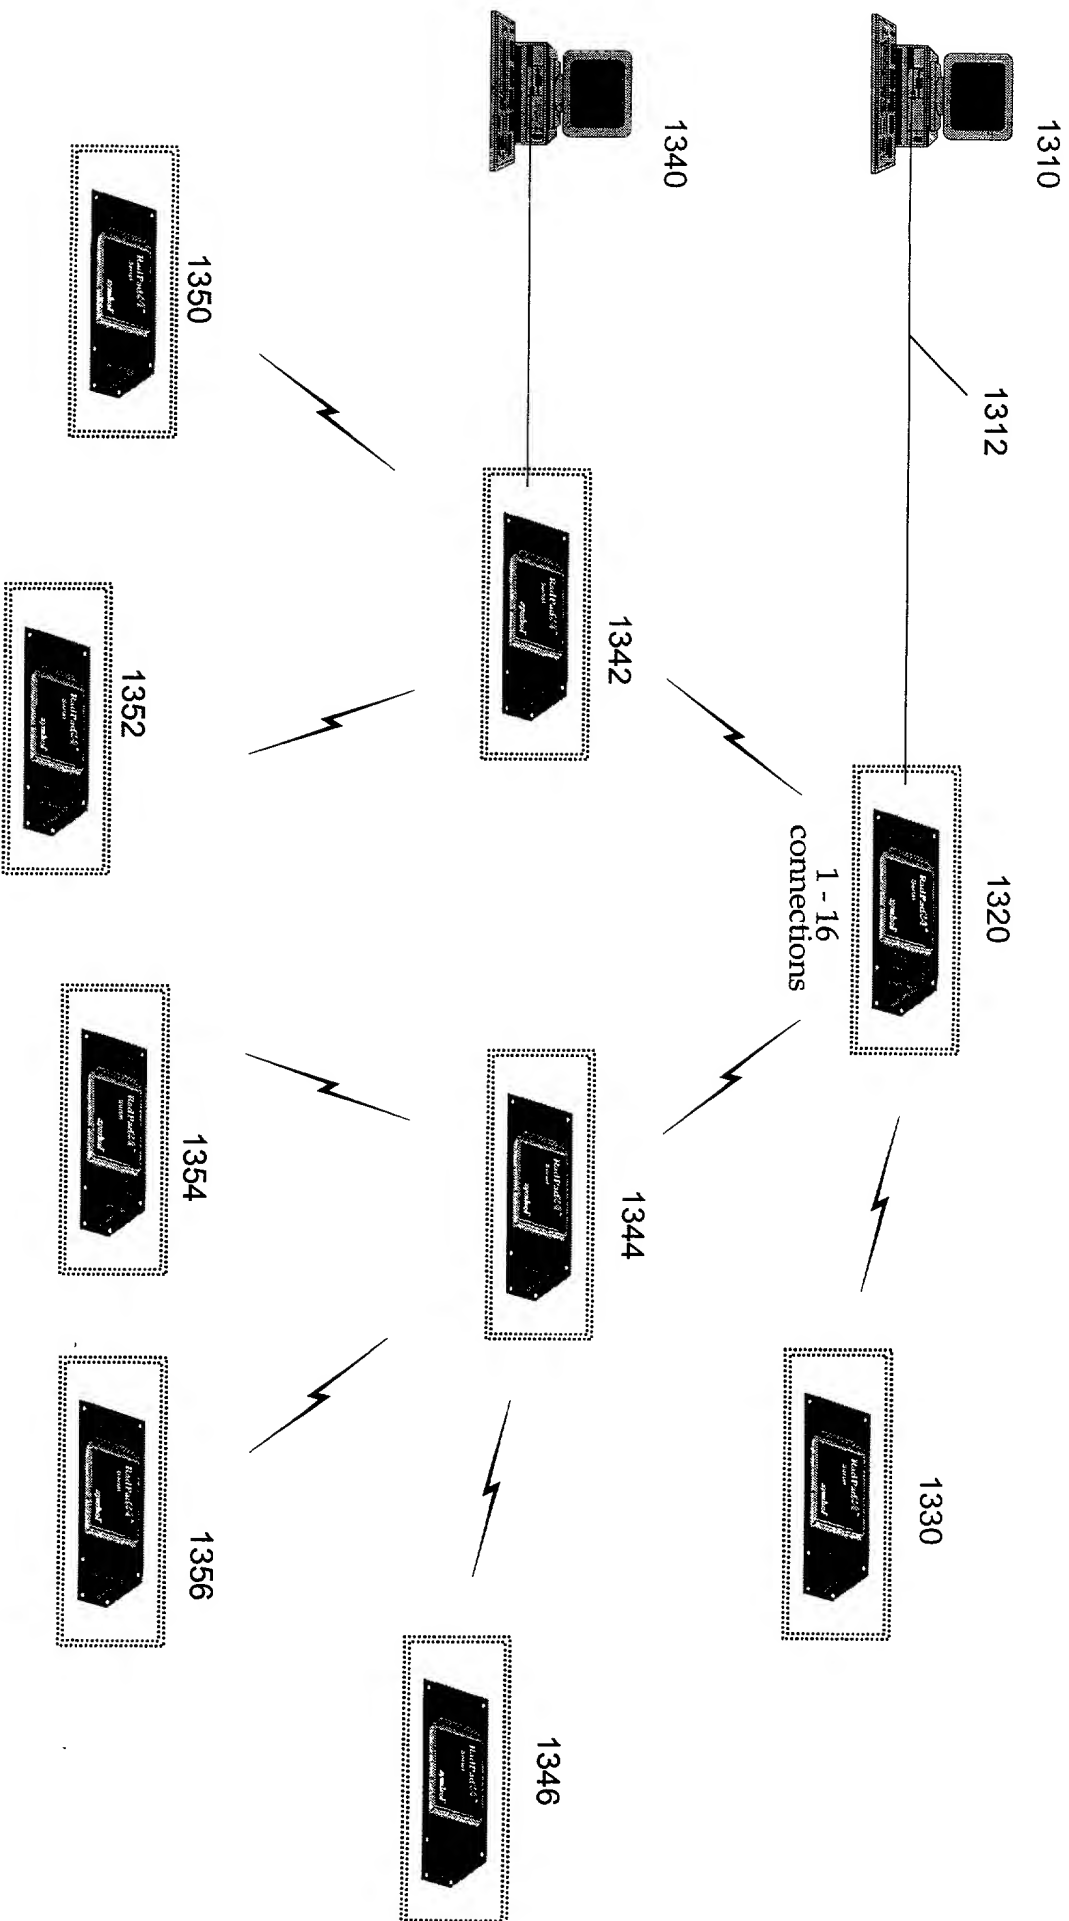


FIG. 13

09433467 000000